


**SPECIFICATIONS:**  
 Contact current Rating:  
 1.8 Amperes for pin1&pin4.  
 0.25 Amperes other contacts  
 Dielectric Withstanding Voltage:AC 100V(RMS)  
 Insulation resistance:100Megohms Minimum.  
 Contact Resistance:  
 30m ΩMax for pin1&pin4  
 50m ΩMax for other contacts  
**Mechanical Characteristics:**  
 Mating Force:35 Newtons.Maximum  
 Unmating Force:10 Newtons.Mlminimum.  
 8N Min After Durability

**MATERIAL:**  
 Housing: LCP  
 Contact: copper alloy(T=0.2mm)  
 Shell: SUS304  
**PLATING:**  
 Contact: Au Plated on contact area  
 Tin Plated on solder area  
 Nickel underplating over all  
 Shell: Nickel Plated  
 operating Temperature:-55° to+85°

料号编码:

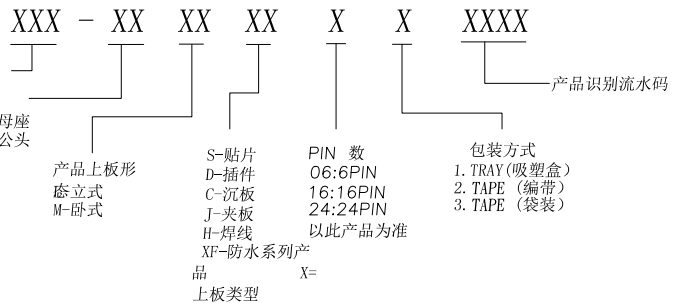

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSTX+

# 深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE: USB-3.0侧插卷边鱼叉脚		PART NO.: <b>ZDX-BFMD04US230</b>		
工程图		TEL: 0755-29888153		
THIRD ANGLE PROJECTION		WEB: <a href="http://www.szzdjmkj.com/">http://www.szzdjmkj.com/</a>		
UNIT: mm	SCALE: 1:1	SIZE: A4	SHEET: 1/2	