

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000M Ω Min.Contact Resistance: 30 M Ω Max.

Dielectric Withstanding Voltage: 500W AC

Temperature Range: -35°C to +85°C

Insulator color: Black/White

Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force: 1.02 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"





03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

料号编码:

XXX	-	XX	XX	XX	X	X	XXXX	产品识别流水码
别								
-母座								
-公头								

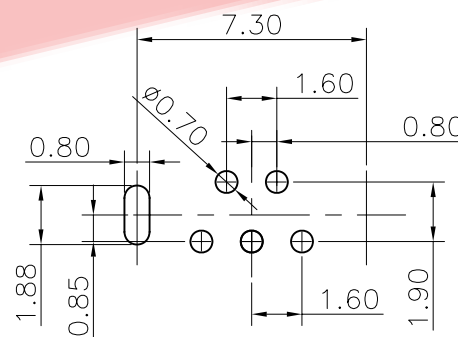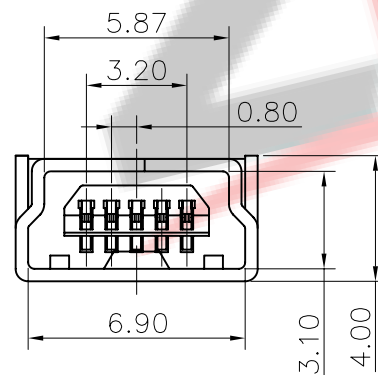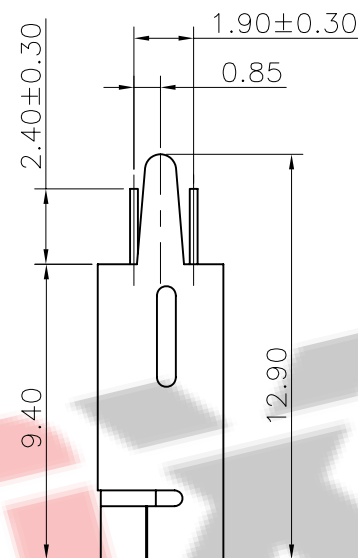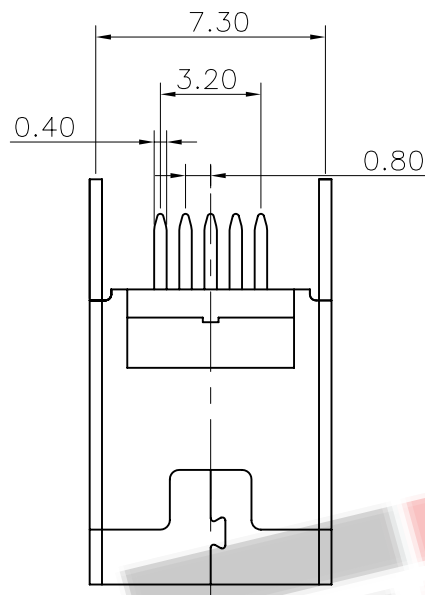

RECOMMENDED PCB LAYOUT



深圳市兆达鑫科技有限公司


Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

MINI 5PN 180度 直插直脚

工程图

THIRD ANGLE PROJECTION

PART NO.: **ZDX-NFLD05ZD09**

TEL: 0755-29888153

WEB: <http://www.szzdjmj.com/>

UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2