




RoHS Compliant Halogen Free




CUSTOMER DRAWING

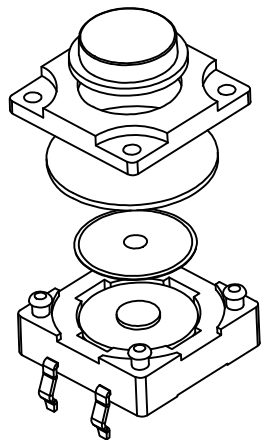


H	
6.0	6.5
.....
13.0	13.5
14.0	15.0

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50m\Omega$
3. 操作力: $250 \pm 40gf$
4. 行程: $0.45 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles
8. 防水等级: IP67
9. 防银迁移: 60V, 85°C, 90%RH/60H

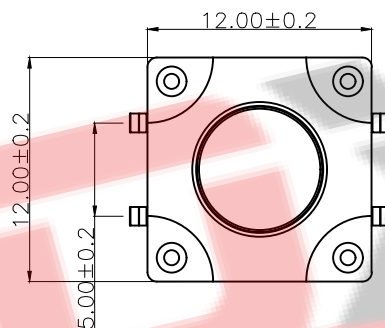


PCB. 焊接图



电路图

7	引脚、触点	黄铜	1	镀银							
6	基座	PPA	1	耐温280°C (黑色)							
5	防水垫	硅胶	1	耐温280°C (黑色)							
4	内按钮	PPA	1	耐温280°C (黑色)							
3	簧片	不锈钢	1	覆银	标记	处数	更改文件号	签名	日期		
2	盖板	PPA	1	耐温280°C (黑色)	设计		刘志强		2016.05.10		
1	按钮	PPA	1	耐温280°C (黑色)	审核		黄少煌		2016.05.10		
序号	零件名称	材料规格	数量	备注	批准		李泽毅		2016.05.12		

第一视角



ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE: 轻触开关

PART NO.: W005-H0001

型号: 12*12防水插脚厚基座

MODEL:

工程图

WEB: <http://www.szzdjmkj.com/>

THIRD ANGLE PROJECTION

UNIT:

SCALE:

SIZE:

SHEET:

mm

1:1

A4

1/2

