



SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:


- 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX&3A
- 1-2. CONTACT RESISTANCE: 40mΩ MAX INITIAL.
- 1-3. INSULATION RESISTANCE: 1000MΩ MIN FOR VOLTAGE 100VDC.
- 1-4. DIELECTRIC WITHSTAND: 100V AC for 1 MINUTE
- 1-5. OPERATING TEMPERATURE: -25℃~+85℃

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERT FORCE: 5~20N Max
- 2-2. WITHDRAW FORCE: 5~20N Min
- 2-3. LIFE TEST :3,000 CYCLES

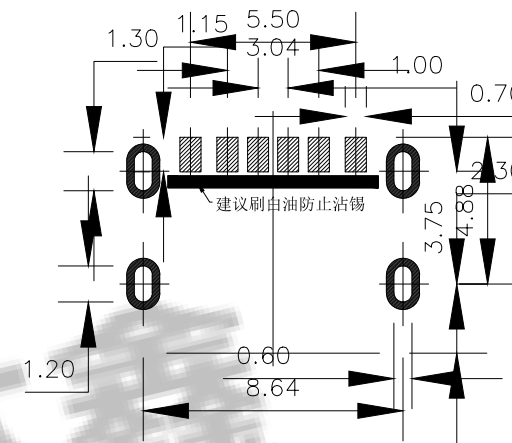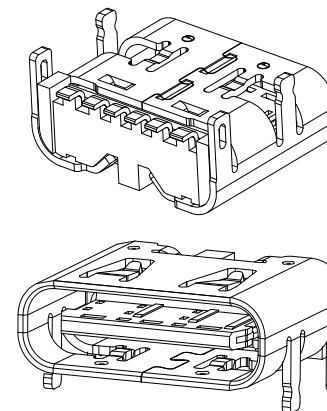

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

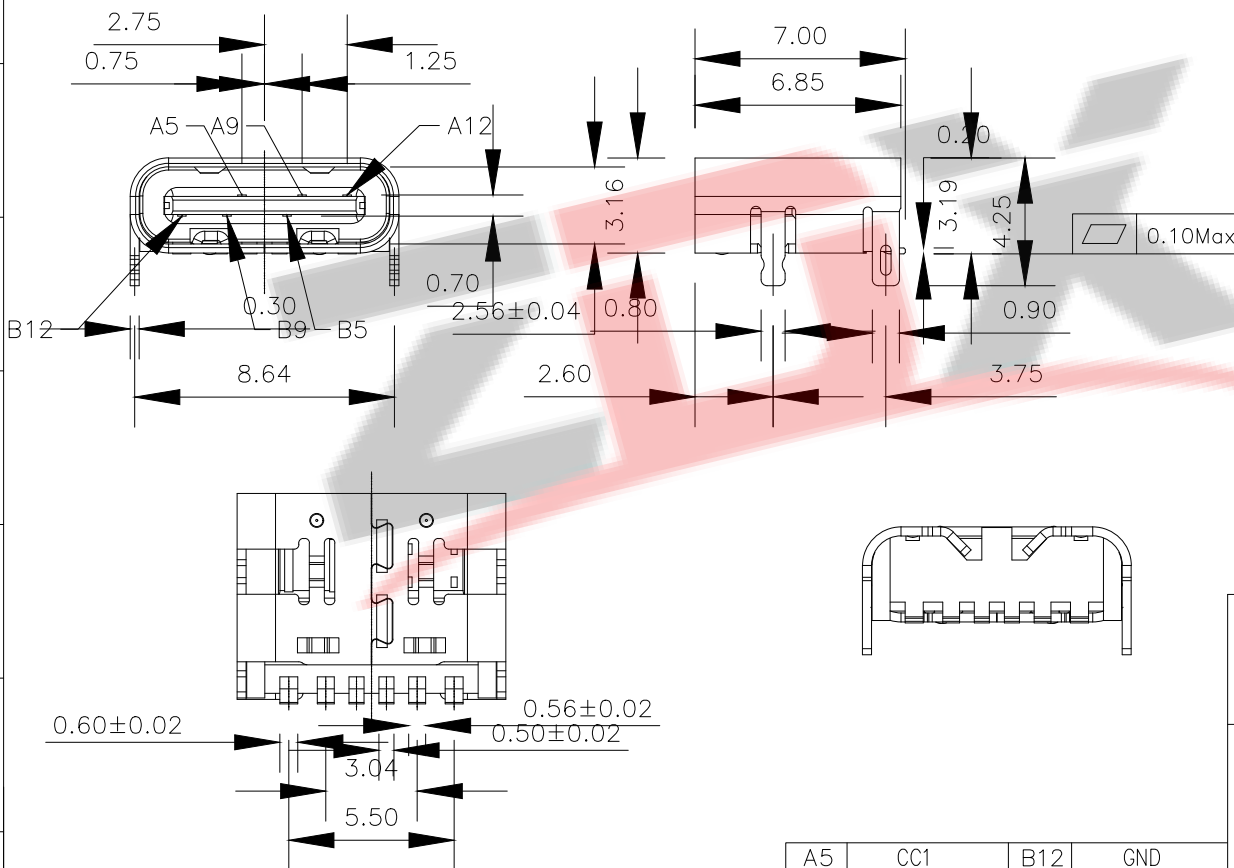

料号编码:

XXX - XX XX XX X X XXXX

产品类别
A-USB A
B-USB B
C-USB C
M-MICRO
N-MINI

产品上板形态
L-立式
M-卧式

S-贴片
D-插件
C-沉板
J-夹板
H-焊线
XF-防水产品
X=上板类型

PIN 数
06:6PIN
16:16PIN
24:24PIN
以此产品为准

包装方式
1. TRAY (吸塑盒)
2. TAPE (编带)
3. TAPE (袋装)

产品识别流水码



深圳市兆达鑫科技有限公司


Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

USB C TYPE 6Pin 板上型 外壳带弹片

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.:ZDX-CFMS62JX61

TEL:0755-29888153

WEB: <http://www.szzdjmkj.com/>

SCALE:

1:1

SIZE:

A4

SHEET:

1/2

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME