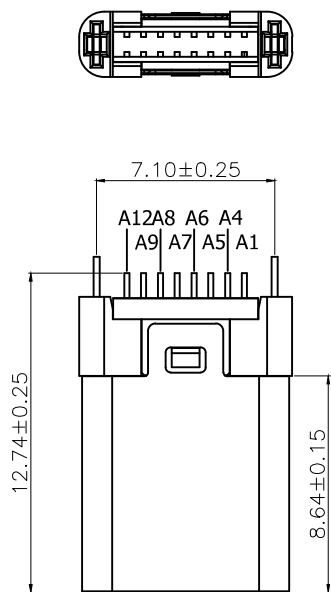


USB TYPE C 接线示意图

A4、A9、B9、B4	V
A5	
B5	
A1、A12、B1、B12	G
A6	D+
A7	D-
(R1=56KΩ R3=56KΩ) 5%	



④	GND LATCH	1	STAINLESS STEEL	NICKEL PLATED OVERALL,TAB WITH LEAD FREE TIN ALLOY
③	CONTACT	16	COPPER ALLOY	NICKEL UNDERPLATING OVER ALL,GOLD PLATING AT CONTACT AREA.LEAD FREE TIN ALLOY AT TERMINATION.
②	SHELL	1	STAINLESS STEEL	CLEAN.
①	HOUSING	2	THERMOPLASTIC UL 94V-0	MOLDED COLOR:BLACK,white
NO.	DESCRIPTION	QTY.	MATERIAL	TREATMENT

参观表

产品料号	规格
ZDX-CMLD162CY30	LCP黑
ZDX-CMLJ162CY31	LCP白

夹板

插板

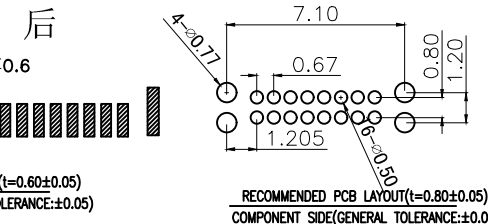

RECOMMENDED PCB LAYOUT(L=0.60±0.05)
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

RECOMMENDED PCB LAYOUT(L=0.80±0.05)
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

NOTES:

1.MECHANICAL:

MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.

2.ELECTRICAL:

CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES

3.ENVIRONMENTAL

OPERATING TEMPERATURE RANGE -30°C ~ +80°C

料号编码:

XXX	-	XX	XX	XX	X	X	XXXX
公司名称							产品识别流水码
产品类别							
A-USB A	F-母座						
B-USB B	M-公头						
C-USB C							
M-MICRO							
N-MINI							
产品上板形态							
L-立式							
M-卧式							
S-贴片							
D-插件							
C-沉板							
J-夹板							
H-焊线							
XF-防水产品							
X=上板类型							
PIN 数							
06:6PIN							
16:16PIN							
24:24PIN							
以此产品为准							
包装方式							
1. TRAY (吸塑盒)							
2. TAPE (编带)							
3. TAPE (袋装)							



深圳市兆达鑫科技有限公司


Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE-C 16PIN直插/夹板公头 高H=12.74MM

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.: 参考表

TEL:0755-29888153

WEB: http://www.szzdjmkj.com/

SCALE:

1:1

SIZE:

A4

SHEET:

1/2