

RoHS Compliant

Halogen Free

customer drawing

NOTE:

1. Electrical Characteristics:

Current Rating: 5A For Pin(A4,A9,B4,B9)

1.25A For Others Pin

Insulation Resistance: 100MΩ Min.

Contact Resistance: 40 mΩ Max.

Dielectric Withstanding Voltage:100V/AC 1Minute

2. Mechanical Characteristics:

Insertion Force: 5~20N

Extraction Force: Initial: 8~20N

After durability: 6~20N

Durability :10000 Cycles

3. Salt Spray :24H

4. Operating Temperature: -30°C TO +85°C

⑥	Shield	1	Stainless Steel	Bright Nickel Plating
⑤	Housing	4	LCP	Color: Black
④	Latch	1	Stainless Steel	
③	Contact	24	Copper Alloy	3u" gold plated on Contact area, Matte Tin plated on Solderails, Nickel underplating over all
②	Emc Spring	2	Stainless Steel	
①	Shell	1	Stainless Steel	Bright Nickel Plating
ITEM	NAME	QTY.	MATERIAL	DESCRIPTION

料号编码:

XXX	-	XX	XX	XX	X	X	XXXX
公司名称							产品识别流水码
产品类别							
A-USB A	F-母座						
B-USB B	M-公头						
C-USB C							
M-MICRO							
N-MINI							
产品上板形态							
L-立式							
M-卧式							
S-贴片							
D-插件							
C-沉板							
J-夹板							
H-焊线							
XF-防水产品							
X=上板类型							
PIN 数							
06:6PIN							
16:16PIN							
24:24PIN							
以此产品为准							
包装方式							
1. TRAY (吸塑盒)							
2. TAPE (编带)							
3. TAPE (袋装)							



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE C 双排公头 拉伸 L=15.5MM(B款)

PART NO.: ZDX-CMMC242CY12

TEL: 0755-29888153

工程图

WEB: <http://www.szzdjmkj.com/>

THIRD ANGLE PROJECTION

UNIT:

SCALE:

SIZE:


SHEET:

mm



1:1

A4

1/1

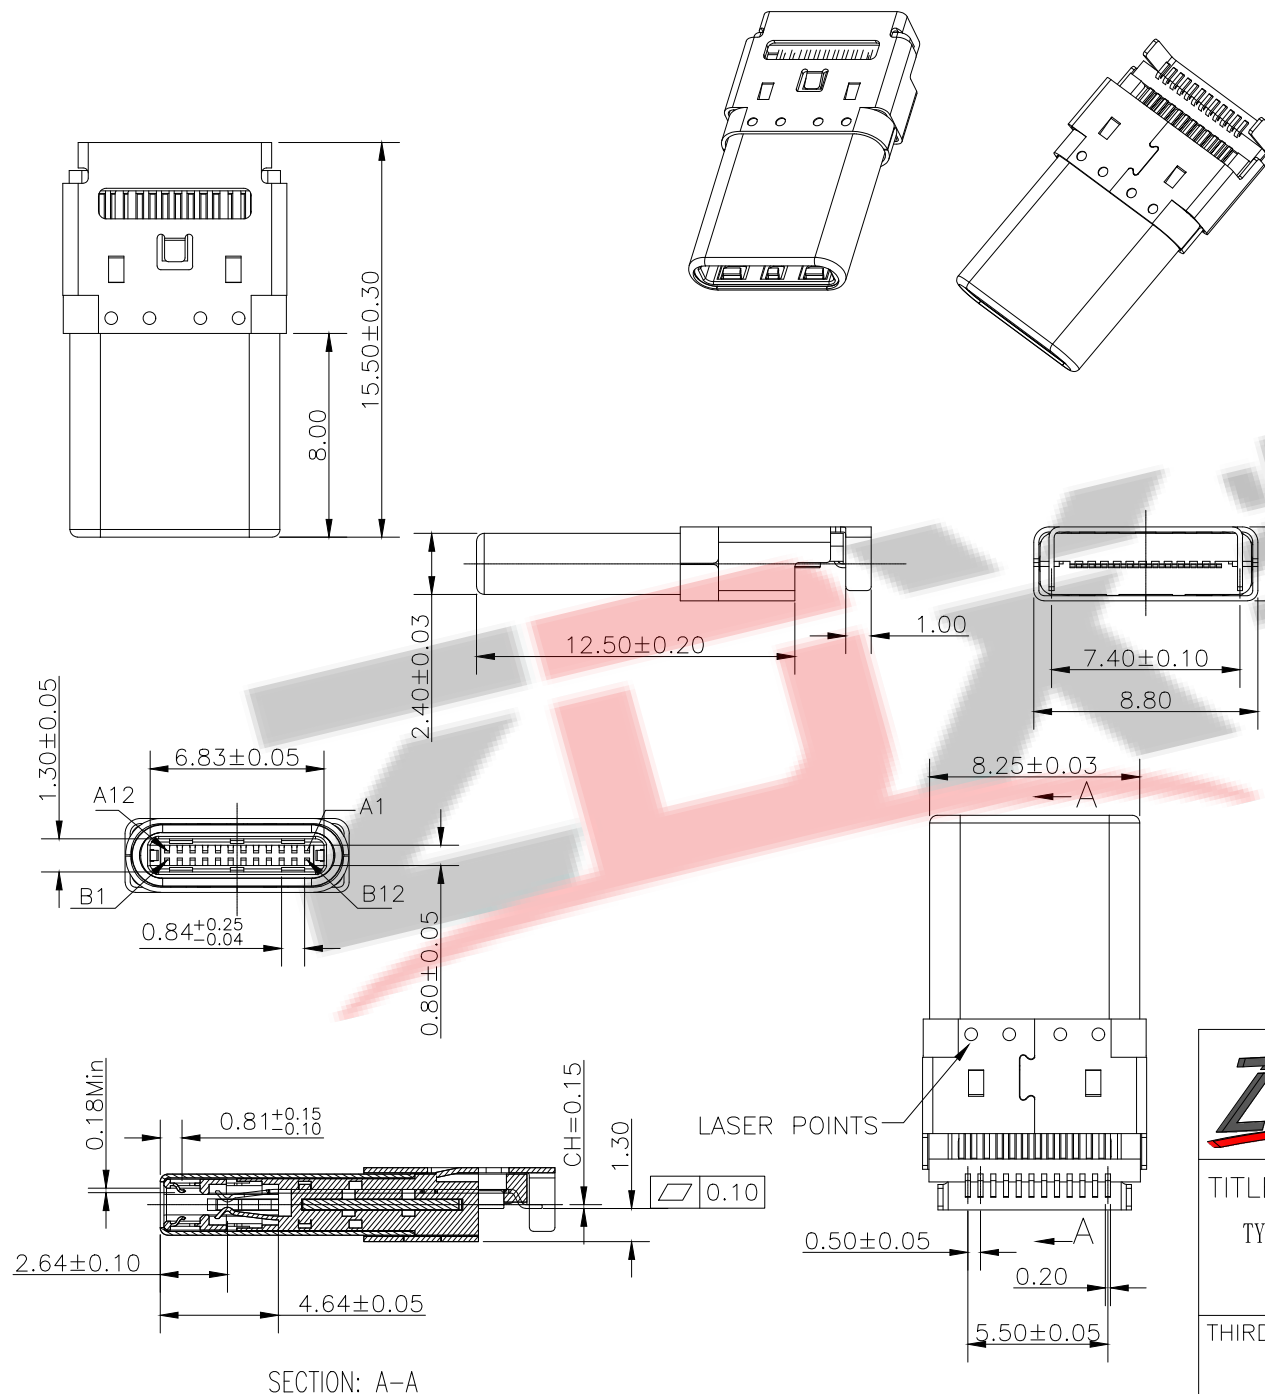


带塞子示意图

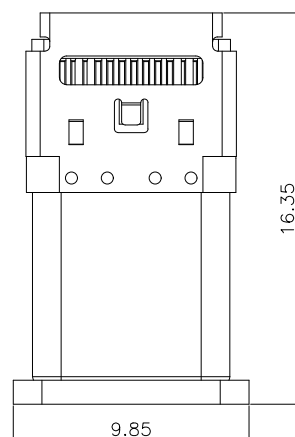

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use(SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair—Position 1	B7	Dn2	Positive half of the USB 2.0 differential pair—Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair—Position 1	B6	Dp2	Negative half of the USB 2.0 differential pair—Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuration Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

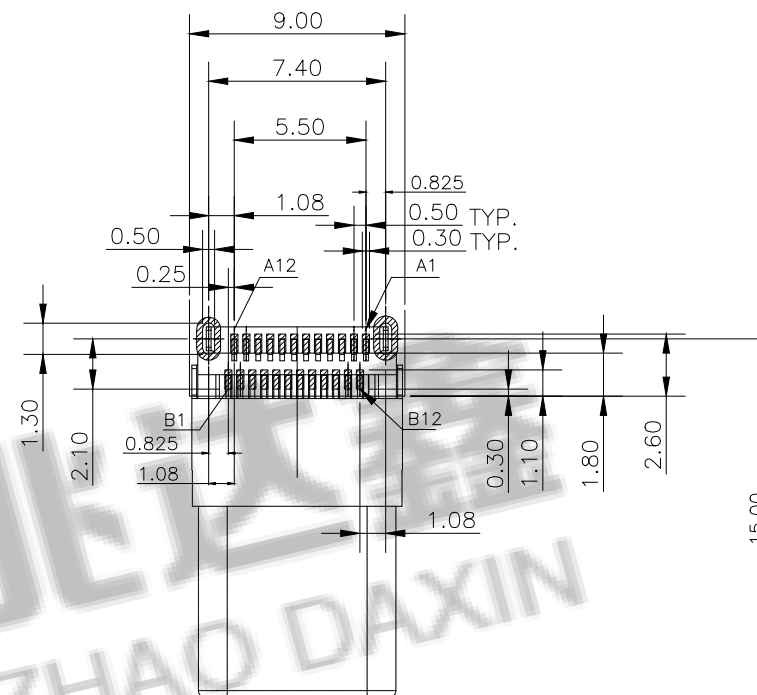
RECOMMENDED P.C.B. LAYOUT
T=0.80 OR 1.00mmTOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$ 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE C 双排公头 拉伸 L=15.5MM(B款)

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.:

ZDX-CMMC242CY12

TEL: 0755-29888153

WEB: <http://www.szzdjmjkj.com/>

SCALE:

1:1

SIZE:

A4


SHEET:

1/1


RoHS Compliant

Halogen Free


customer drawing

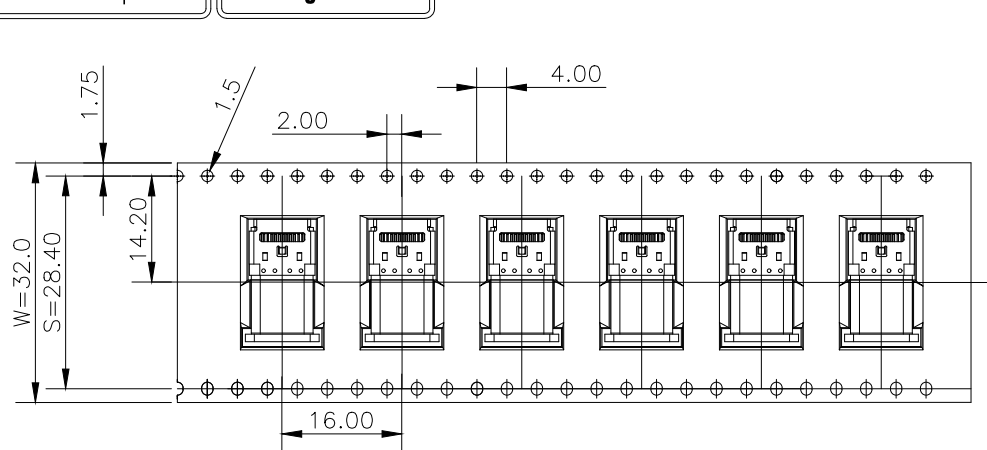


① 产品入载带示意图

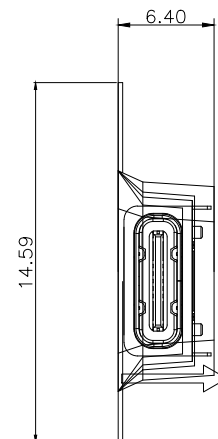

② 卷盘贴标签示意图

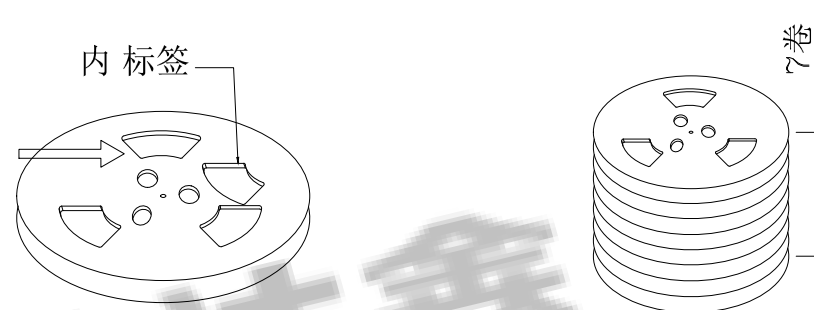

③ 7盘产品叠层示意图

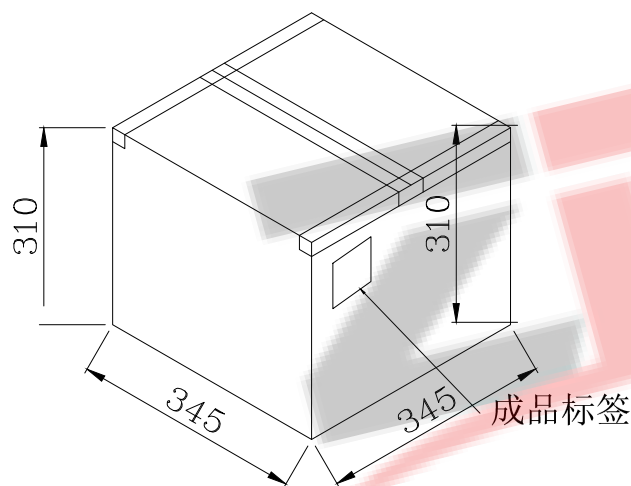

⑤ 外箱封箱示意图

包装说明:

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装1000PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留22PCS空格,后面留22PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,剥离角度:165°-180°

④ 产品入外箱示意图

	REEL	CARTON
CONNECTOR (PCS)	1000	


深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE C 双排公头 拉伸 L=15.5MM(B款)

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.: ZDX-CMMC242CY12

TEL: 0755-29888153

WEB: <http://www.szzdjmj.com/>

SCALE:

1:1

SIZE:

A4

SHEET:

1/1