
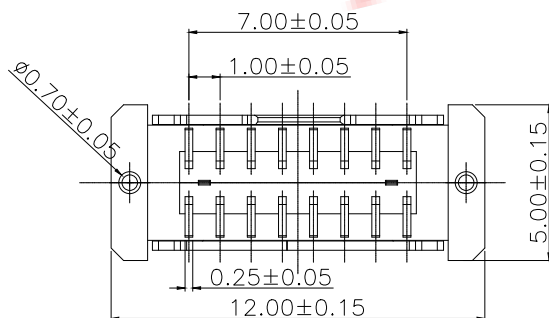
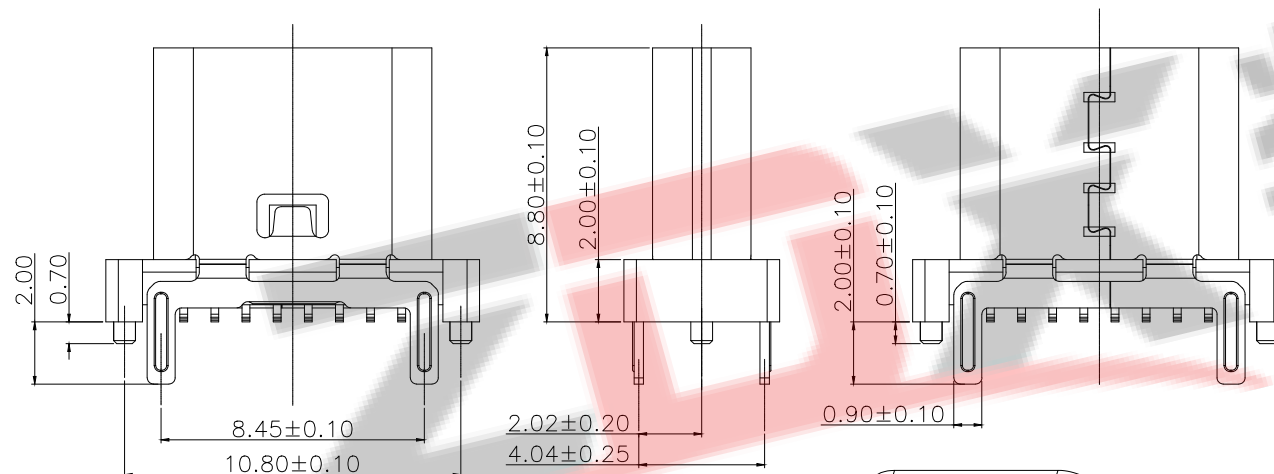
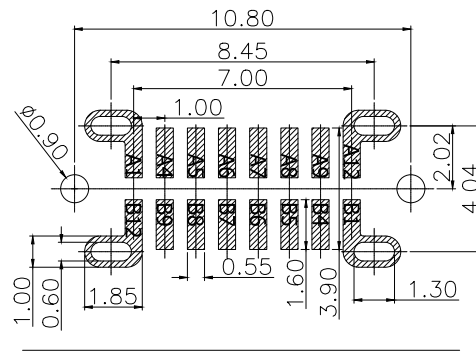


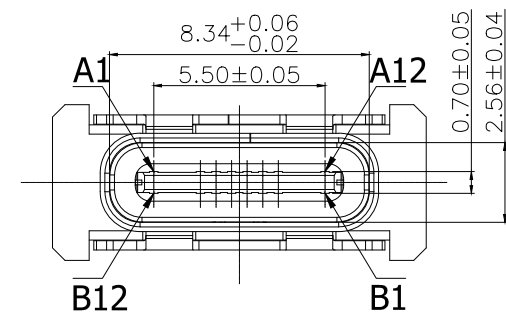

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-	SBU1	VBUS			GND
GND			VBUS	SBU2	D-	D+	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

特性:

一、电气性能: ELECTRICAL

1. 额定电流: 5.0A
2. 接触阻抗: 40 MILLIOHMS MAX
3. 耐电压: 100V AC / 1 mA MAX
4. 绝缘阻抗: 150V DC/100 MEGA OHMS MIN

二、机械性能:

1. 插入力: 5~20N
2. 拔出力: 8~20N
3. 使用寿命: 10000次、拔出 5N MIN

三、材料: MATERIAL

四、电镀: FINISH

1. 端子: 接触点镀金1U~MIN
PIN脚焊接区域镀锡80U~MIN

2. 外壳: 镀镍80U~MIN (盐雾48H)

五、电镀品需做粘锡测试: 粘锡面积达到95%以上。

六、SMT回流焊 (峰值260° C±5° C) 不能起泡、熔胶、变色不良 (变形在公差范围以内)

七、工作温度: -55° C~+85° C

八、盐雾测试: 通过48H在浓度为5±1%盐水的盐雾测试无生锈现象

BOM					
序号	名称	料号	用量	品名规格	
1	外壳		1	Typec立插 外壳 SUS304 T=0.30mm	
2	Molding 3		1	Typec立插 SMT 16PIN Molding C7025 LCP黑色 半成品	
2.1	Molding 1		1	Typec立插 SMT 16PIN Molding A C7025 LCP黑色	
2.2	Molding 2		1	Typec立插 SMT 16PIN Molding B C7025 LCP黑色	
2.3	卡勾		1	Typec立插 16PIN 卡勾 SUS301 T=0.15mm	

料号编码:

XXX	-	XX	XX	XX	X	X	XXXX
公司名称							产品识别流水码
产品类别							
A-USB A F-母座							
B-USB B M-公头							
C-USB C							
M-MICRO							
N-MINI							
产品上板形态							
L-立式							
M-卧式							
S-贴片							
D-插件							
C-沉板							
J-夹板							
H-焊线							
XP-防水系列产品							
X-上板类型							
PIN 数							
06:6PIN							
16:16PIN							
24:24PIN							
以此产品为准							
包装方式							
1. TRAY (吸塑盒)							
2. TAPE (编带)							
3. TAPE (袋装)							



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

Type-C 16PIN 立插 SMT 型 L=8.8


PART NO.: ZDX-CFLS162JC02

TEL: 0755-29888153

工程图

WEB: <http://www.szzdjmkj.com/>

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:


1:1

SIZE:

A4

SHEET:


1/2

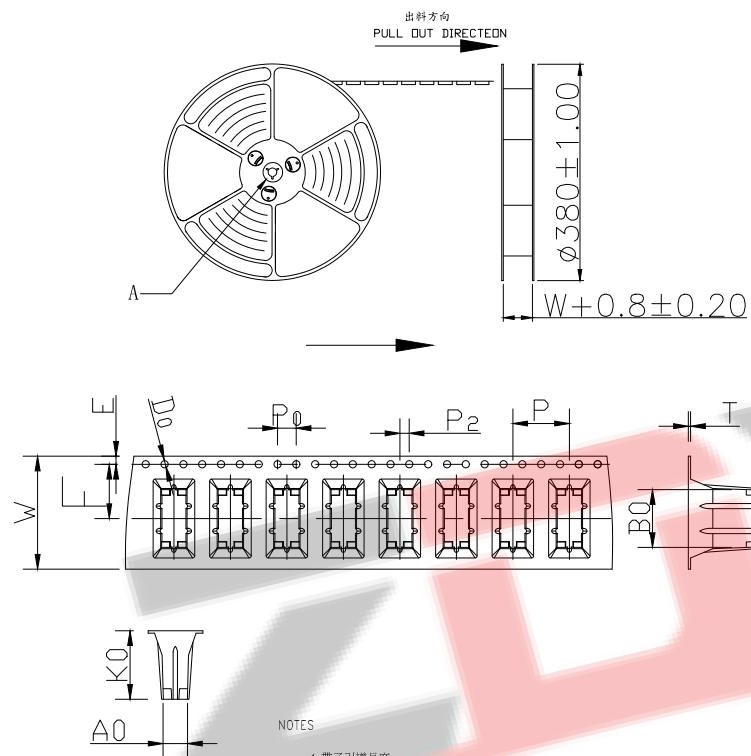

NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTION

2. 上帶 剝力力為: $0.1 \sim 1.3N$ ($10.2gf \sim 130gf$)
PEELING OFF FORCE OF TOP TAPE: $0.1 \sim 1.3N$ ($10.2gf \sim 130gf$)
出貨'運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT;
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION




DETAIL: A

10:1

紙箱: 390mmX390mmX310mm

at small positioning hole of the carrier tape side).
標籤黏貼處 (朝捲裝包材的小定位孔一側)
Location of label sticking (label)

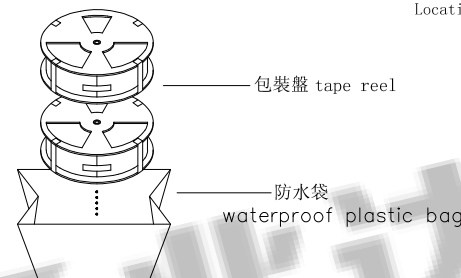

NOTE:

- 每捲包裝數量及每箱裝箱數量如左下表格。
Packing q'ty of each reel & carton as below table shown.
- 將裝滿產品的卷盤放入紙箱并以膠帶封口
Put reels in the carton and use adhesive tape to seal up.

W	24.00±0.3
A0	5.24±0.1
B0	12.30±0.1
K0	13.35±0.1
P	12.00±0.1
F	11.50±0.1
E	1.75±0.1
D0	1.50±0.1
P0	4.00±0.1
P2	2.00±0.1
T	0.50±0.05

卷帶	規格: $\phi 380mm$	包裝數量: 600PCS
紙箱	規格: 390mmX390mmX310mm	包裝數量: 10盤 (6000PCS)



深圳市兆达鑫科技有限公司


Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

Type-C 16PIN 立插 SMT 型L=8.8 包装规范

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.: ZDX-CFLS162JC02

TEL: 0755-29888153

WEB: <http://www.szzdjmkj.com/>

SCALE:

1:1

SIZE:

A4

SHEET:

1/2