RoHS Compliant | Halogen Free

customer drawing

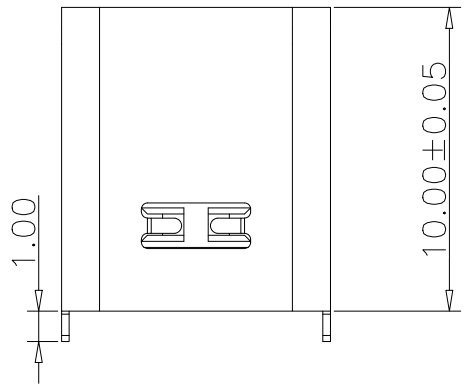

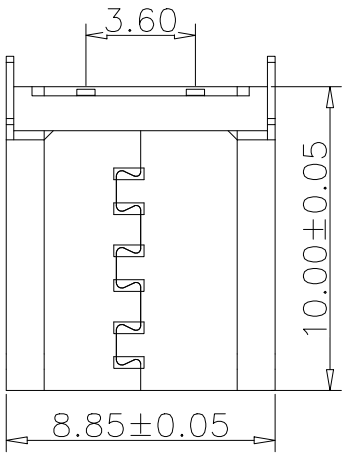

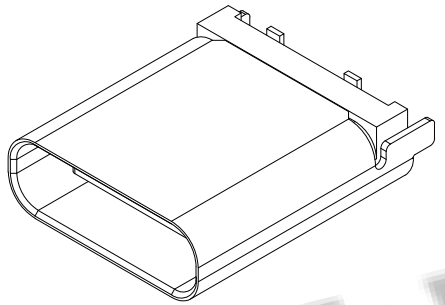

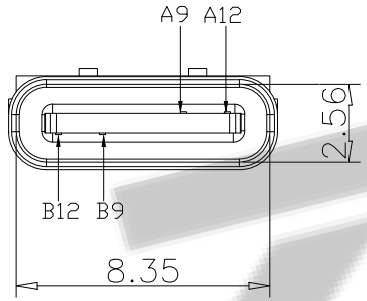

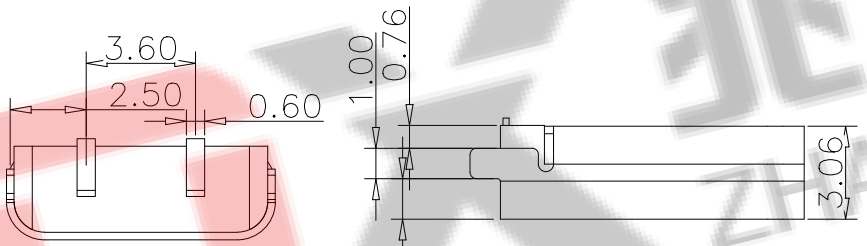

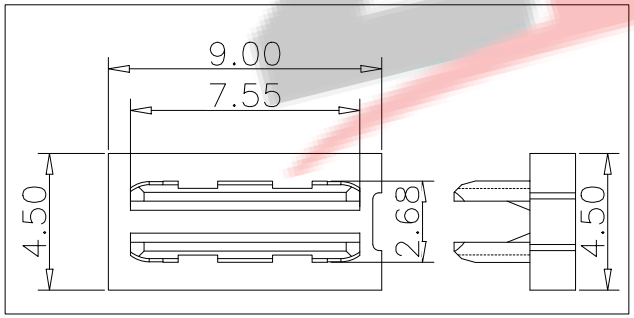

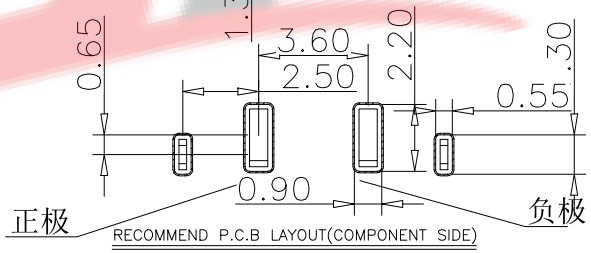

备注(NOTE):

1材质:

1.1胶芯：LCP UL94 V-0

1.2端子：C2680,T=0.2mm；镍底，镀金

1.3外壳：不锈钢201-H 表面镀镍

2.电气特性：

2.1.接触区：接触电阻40mΩ Max,允许10mΩ变化量. 测试条件:20mv，100mA下测量.

2.2.接触电流：3A VBUS引脚；1.25A用于GND引脚；其他引脚为0.25A.

2.3.额定电压：5V.

2.4.耐电电压：100VAC.

2.5.绝缘电阻：至少100兆欧 .

3.机械性能：

3.1.插入力：0.5-2.0Kg

3.2.拔出力：0.6-2.04Kg

3.3.插拔次数：5000次.

4.工作环境：-20℃ to +85℃.

5.耐焊接热：端子浸入250±5℃的锡槽中；历时3-5S±0.5Sec，沾锡面积95%以上

6.外观：部件可以承受以下焊接条件：温度250℃，时间8-10秒，外观无损坏变形

7.包装：编带，800pcs一盘

料号编码:

XXX - XX XX XX X X XXXX

- 公司名称
- 产品类别: A-USBA F-母座 B-USBB M-公头 C-USBC M-MICRO N-MINI
- 产品上板形态: L-立式 M-卧式
- S-贴片 D-插件 C-沉板 J-夹板 H-焊线 XF-防水系列产品 X-上板类型
- PIN 数: 06:6PIN 16:16PIN 24:24PIN 以此产品为准
- 包装方式: 1.TRAY(吸塑盒) 2.TAPE (编带) 3.TAPE (袋装)
- 产品识别流水码

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY,NI30u"Min PLATED
2	CONTACT	6	C2680,TIN80u"/Au1u"/NI30u" PLATED
3	1MD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE-C2P立贴10.0

工程图

PART NO.:ZDX-CFLS022ZH06

TEL:0755-29888153

WEB:http://www.szzdjmkj.com/

THIRD ANGLE PROJECTION

UNIT:	SCALE:	SIZE:	SHEET:
mm	1:1	A4	1/2