
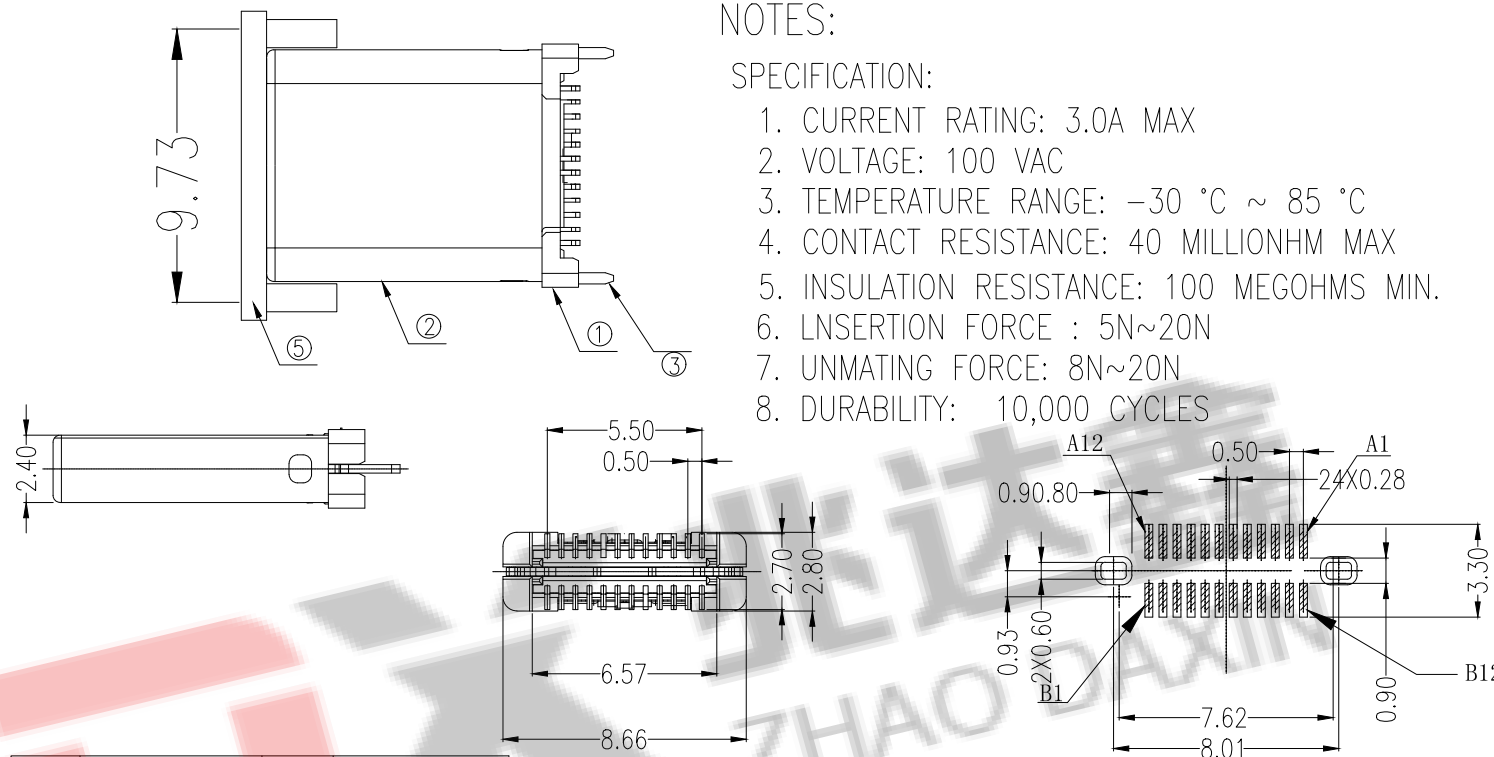


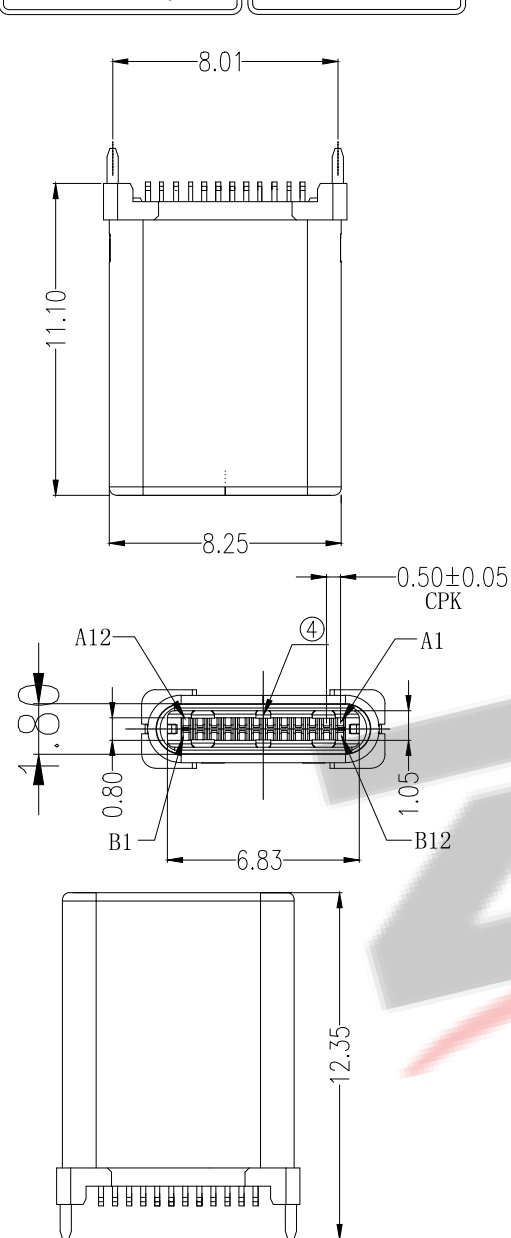

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	COVER	HIGH TEMPERATURE PLASTIC	LCP BLACK	1PCS
4	SPRING	STAINLESS STEEL	---	2PCS
3	LATCH	STAINLESS STEEL	TIN: 80~120u"Min/Ni base: 50u"Min Plated	1PCS
2	SHELL	STAINLESS STEEL	Ni: 50u"Min Plated	1PCS
1	TERMINAL HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK/CONTACT: Au: 1u"Min Ni base 50u"Min	2PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

料号编码: XXX - XX XX X X XXXX
RECOMMENDED PCB LAYOUT(t=0.80±0.05)
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

公司名称
产品类别
A=USB
B=SSB
C=SSC
M=MCRO
N=MINI
T=母座
M=公头
产品上板形态
L=立式
M=卧式
S=贴片
D=插件
C=沉板
J=夹板
H=焊线
X=防水系列产品
X=上板类型
PIN 数
06:6PIN
16:16PIN
24:24PIN
以此产品为准
包装方式
1. TRAY (吸塑盒)
2. TAPE (编带)
3. TAPE (袋装)

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE: 3.1 TYPE C 直立式公头无 脚拉伸壳无定位柱 工程图		PART NO.:ZDX-CMLS2420043		
		TEL:0755-29888153		
		WEB: http://www.szzdjmkj.com/		
THIRD ANGLE PROJECTION 	UNIT: mm	SCALE: 1:1	SIZE: A4	SHEET: 1/2