

RoHS Compliant

Halogen Free

customer drawing

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

RECOMMENDED PCB LAYOUT($t=0.80\pm0.05$)
COMPONENT SIDE(GENERAL TOLERANCE: ±0.05)

5	COVER	HIGH TEMPERATURE PLASTIC	LCP BLACK	1PCS
4	SPRING	STAINLESS STEEL	---	2PCS
3	LATCH	STAINLESS STEEL	TIN: 80~120u"Min/Ni base: 50u"Min Plated	1PCS
2	SHELL	STAINLESS STEEL	Ni: 50u"Min Plated	1PCS
1	TERMINAL HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK/CONTACT: Au: 1u"Min Ni base 50u"Min	2PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

料号编码:

XXX - XX XX XX X X XXXX	产品类别	产品识别流水码
A-USB A-USB B-USB C-USB M-MICRO N-MINI	产品类别	
I-母座 M-公头	产品类别	
产品上板形态	产品类别	
S-贴片 D-插件 C-沉板 J-夹板 H-引线 X-前水系列产品 X=上板类型	产品类别	
PIN 数 06:6PIN 16:16PIN 24:24PIN 以此产品为准	产品类别	
包装方式 1. TRAY (吸塑盒) 2. TAPE (编带) 3. TAPE (袋装)	产品类别	

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE: PART NO.: ZDX-CMLS2420045

3.1 TYPE C 直立式公头三只脚带倒角 TEL: 0755-29888153

工程图

WEB: <http://www.szzdjmj.com/>

THIRD ANGLE PROJECTION

UNIT:

SCALE:

SIZE:

SHEET:

mm

1:1




A4

1/2

RoHS Compliant

Halogen Free

customer drawing

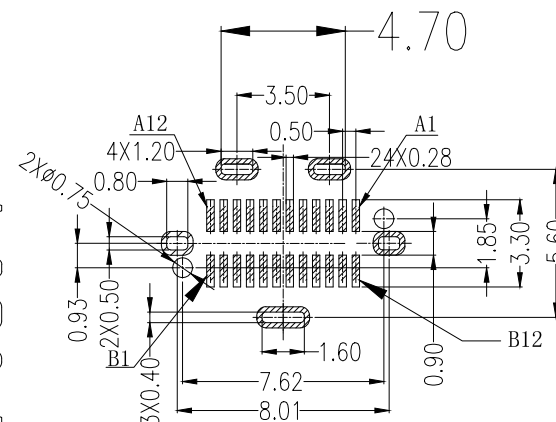
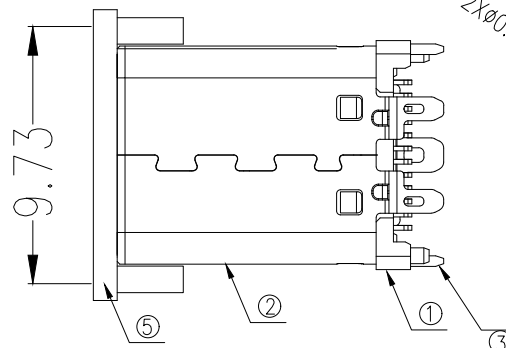
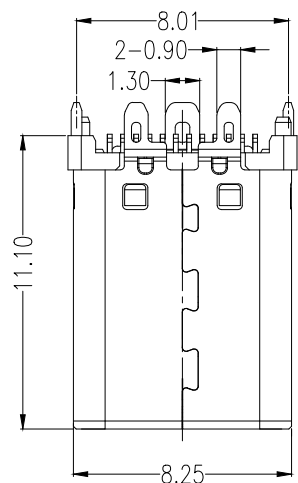
RECOMMENDED PCB LAYOUT(t=0.80±0.05)
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES


5	COVER	HIGH TEMPERATURE PLASTIC	LCP BLACK	1PCS
4	SPRING	STAINLESS STEEL	---	2PCS
3	LATCH	STAINLESS STEEL	TIN: 80~120u"Min/Ni base: 50u"Min Plated	1PCS
2	SHELL	STAINLESS STEEL	Ni: 50u"Min Plated	1PCS
1	TERMINAL HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK/CONTACT: Au: 1u"Min Ni base: 50u"Min	2PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

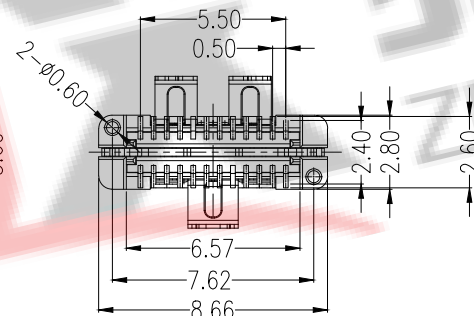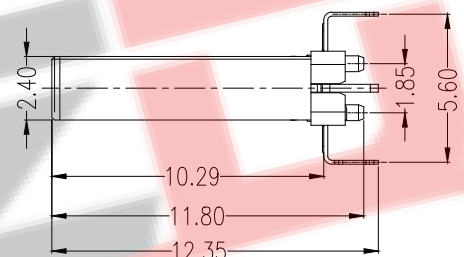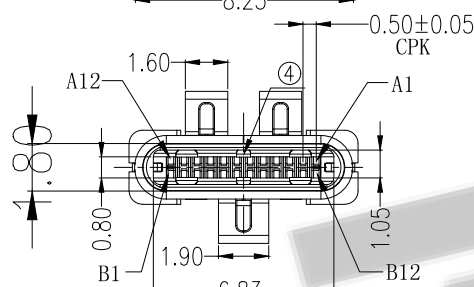

料号编码:

XXX - XX XX X X XXXX

公司名称	产品类别	产品上板形态	S-贴片 D-插件 C-沉板 J-夹板 H-焊线 X=防水系列产品	PIN 数 06:6PIN 16:16PIN 24:24PIN 以此产品为准	包装方式 1. TRAY(吸塑盒) 2. TAPE(编带) 3. TAPE(袋装)
A=USBA B=SSB C=ISBC M=MICRO N=MINI	T=母座 M=公头				

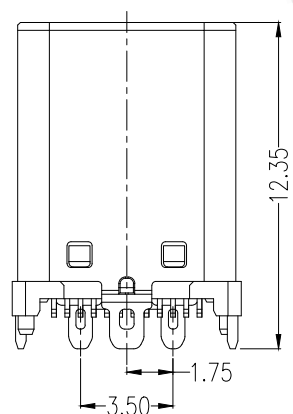

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



深圳市兆达鑫科技有限公司


Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE-C/M 直立式公头三只脚H11.0

工程图

THIRD ANGLE PROJECTION



PART NO.:CMLS2420045

TEL:0755-29888153

WEB: http://www.szzdjmkj.com/

UNIT:

mm

SCALE:

1:1

SIZE:

A4


SHEET:

1/2

RoHS Compliant


Halogen Free

customer drawing


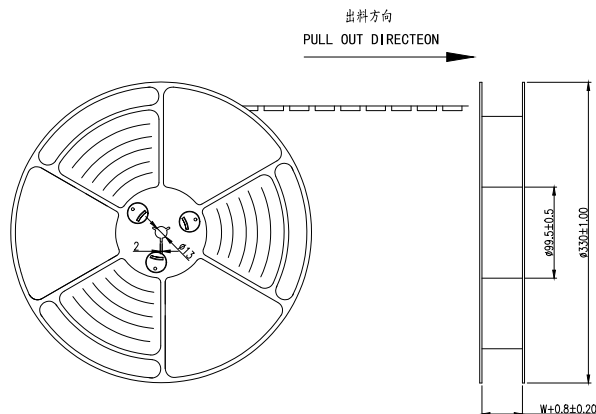


NOTES

- 1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

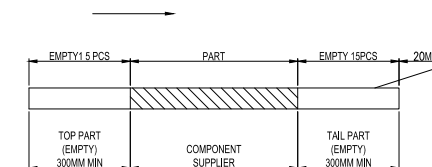

- 2.上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

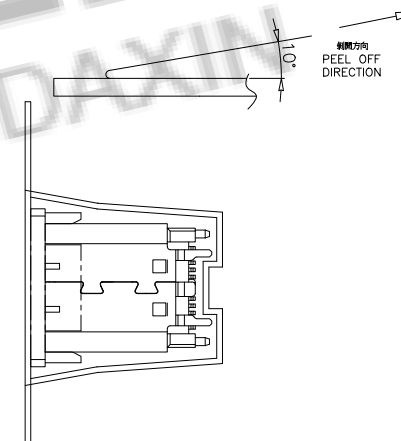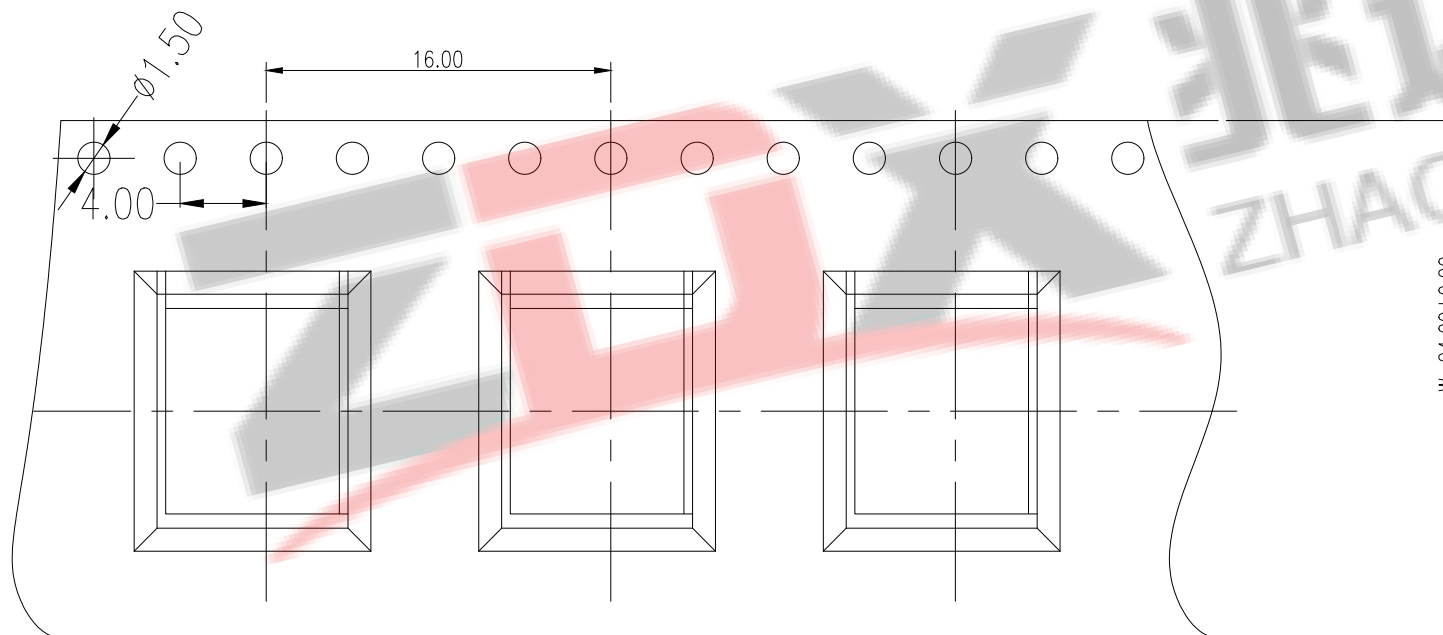

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE:		PART NO.:ZDX-CMLS2420045			
		TEL: 0755-29888153			
		WEB: http://www.szzdjmjkj.com/			
工程图					
THIRD ANGLE PROJECTION		UNIT:	SCALE:	SIZE:	SHEET:
		mm	1:1	A4	1/2



RoHS Compliant

Halogen Free

customer drawing

標籤黏貼處 (朝捲裝包材的小定位孔一側)

Location of label sticking (label

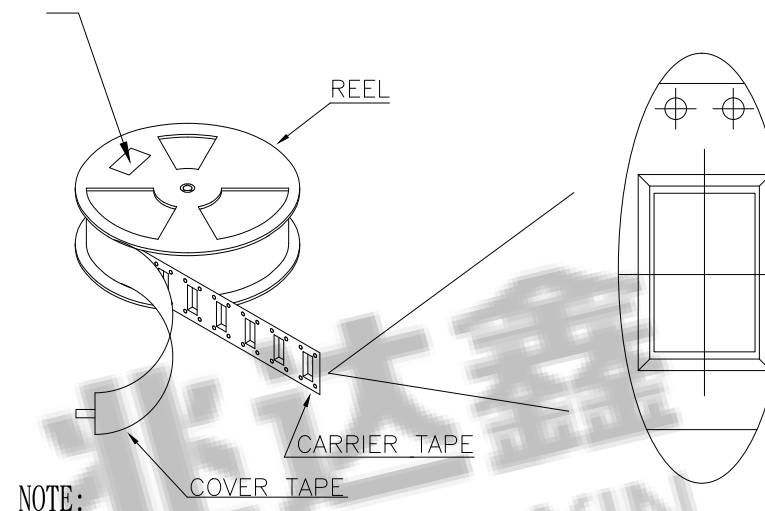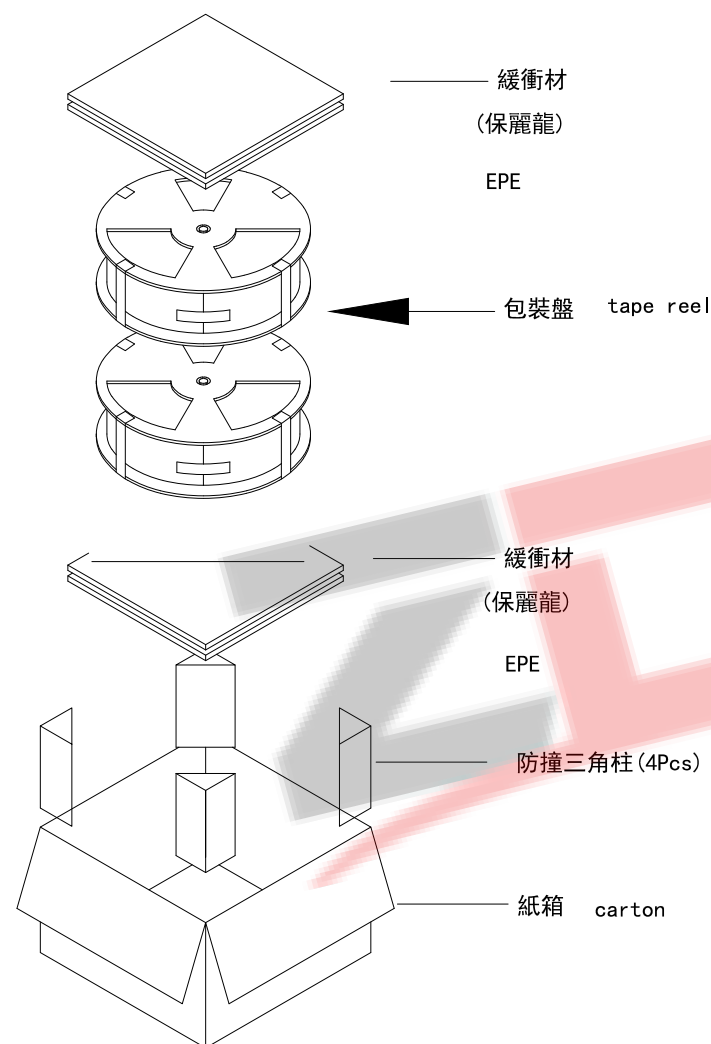

NOTE:

1. 每捲包裝數量及每箱裝箱數量如左下表格。
Packing q'ty of each reel & carton as below table shown.
2. 以上膠帶覆蓋下包裝帶經包裝機熱熔包裝
Use cover tape to cover and hot melt machine to seal up.
3. 每個紙箱放2個珍珠棉
Every carton use 2pcs EPE.
4. 將裝滿產品的卷盤放入紙箱并以膠帶封口
Put reels in the carton and use adhesive tape to seal up.

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE:	PART NO.:ZDX-CMLS2420045			
	TEL:0755-29888153			
	WEB: http://www.szzdjmjkj.com/			
工程图		UNIT: mm		
THIRD ANGLE PROJECTION		SCALE: 1:1	SIZE: A4	SHEET: 1/2

產品料號 (PRODUCT No.)	包裝容量 (PACKING CAPACITY)			重量 WEIGHT (Kg)		
	PCS/REEL	REELS/CARTON	PCS/CARTON	N.W./PCS	N.W./BOX	G.W./BOX
FUCR-244X-04XR	300	11	3300			