
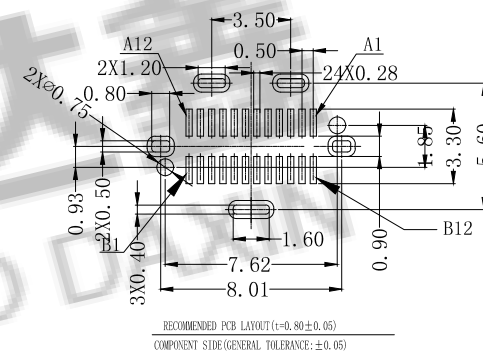
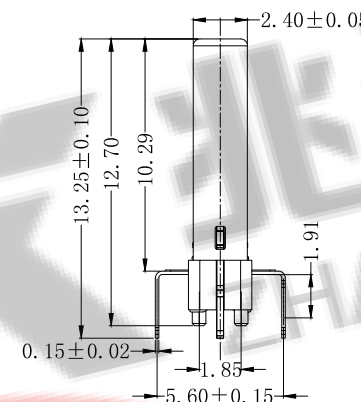
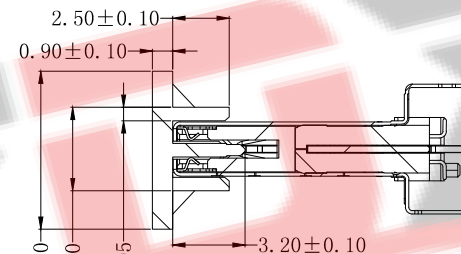
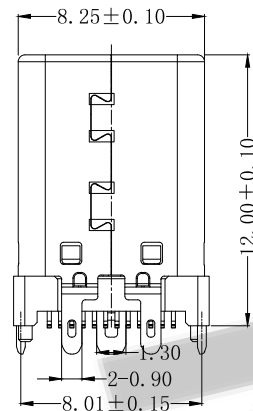
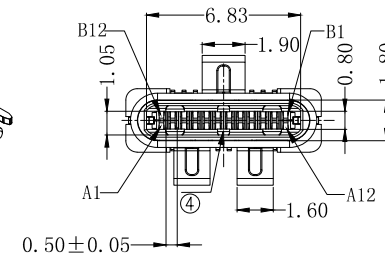

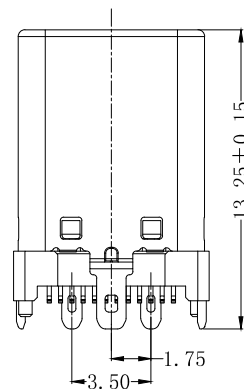


NOTES:

SPECIFICATION:


1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : $5\text{N} \sim 20\text{N}$
7. UNMATING FORCE: $8\text{N} \sim 20\text{N}$
8. DURABILITY: 10,000 CYCLES

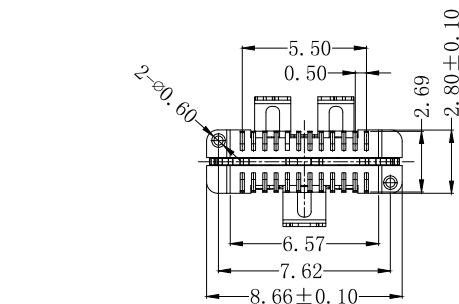

RECOMMENDED PCB LAYOUT (±0.80±0.05)
COMPONENT SIDE (GENERAL TOLERANCE: ±0.05)

料号编码:

XXX - XX XX XX X X XXXX
公司名称 产品类别 产品上板形态 S-贴片 D-插件 PIN 数 包装方式
A-USB F-母座 L-立式 M-卧式 06:6PIN 1. TRAY (吸塑盒)
B-USB M-公头 C-沉板 16:16PIN 2. TAPE (编带)
C-USBC M-MICRO N-MINI H-焊线 24:24PIN 3. TAPE (袋装)
I-焊线 以此产品为准
XF-防水系列产品
X=上板类型

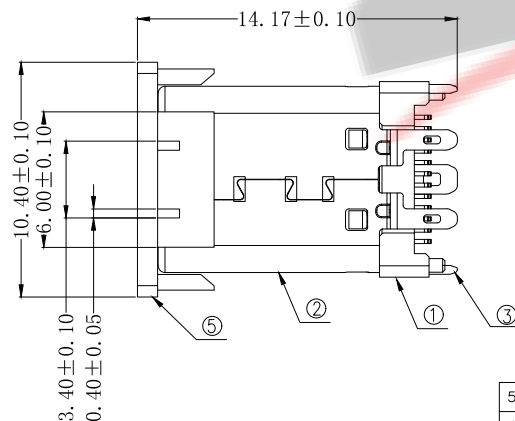


A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME


5	COVER	HIGH TEMPERATURE PLASTIC	LCP BLACK	1PCS
4	SPRING	STAINLESS STEEL	---	2PCS
3	LATCH	STAINLESS STEEL	TIN: 80-120u"Min/Ni base: 50u"Min Plated	1PCS
2	SHELL	STAINLESS STEEL	Ni: 50u"Min Plated	1PCS
1	TERMINAL HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK/CONTACT: Au: 3u"Min Ni base: 50u"Min	2PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd


TITLE:		PART NO.: ZDX-CMLS2420046		
TYPE-C 24PIN 立式贴片公头 三支脚 H=12.0MM		TEL: 0755-29888153		
工程图		WEB: http://www.szddjmkj.com/		
THIRD ANGLE PROJECTION 	UNIT:	SCALE:	SIZE:	SHEET:
	mm	1:1	A4	1/2

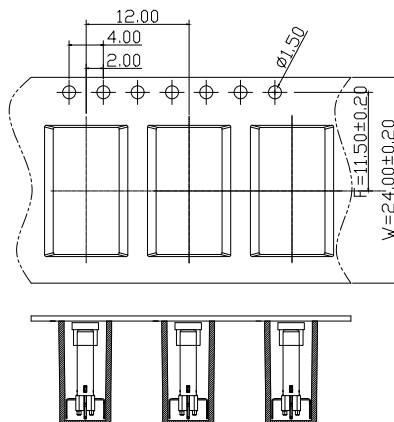


① 产品入载带示意图




② 卷盘贴标签示意图



③ 10盘产品叠层示意图

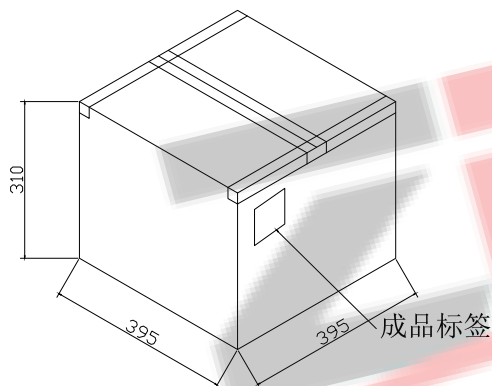

⑤ 外箱封箱示意图

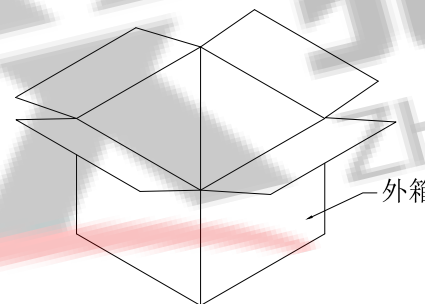

④ 产品入外箱示意图

料号编码:

包装说明:

1. 将检验好的成品;SMT朝下放入载带底部;每卷装500PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每10盘叠;具体如图三所示
4. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
5. 载带前面留10PCS空格,后面留10PCS空格
6. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,
剥离角度:165° -180°



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE-C 24PIN立式贴片公头 三支脚 H=12.0MM
包装规范


工程图

PART NO.: ZDX-CMLS2420046

TEL: 0755-29888153

WEB: <http://www.szddjmkj.com/>

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2