
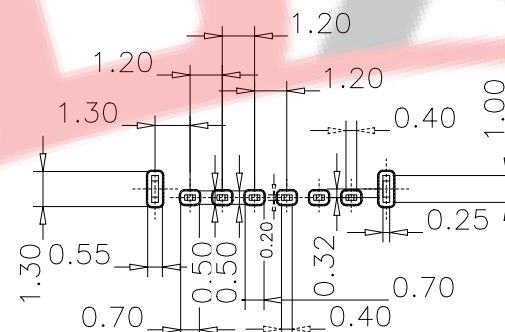
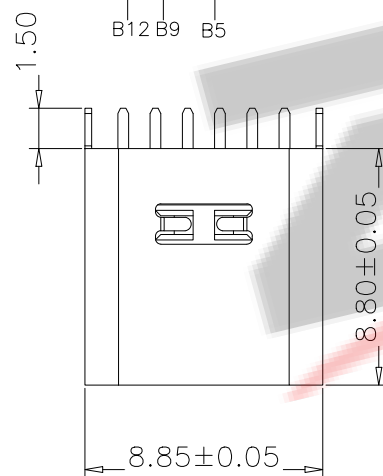
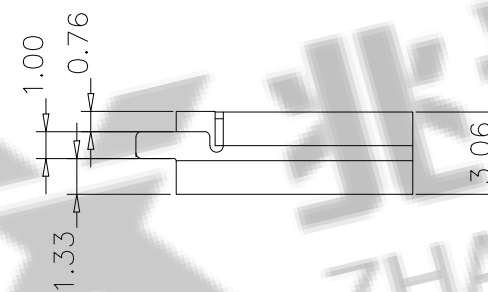


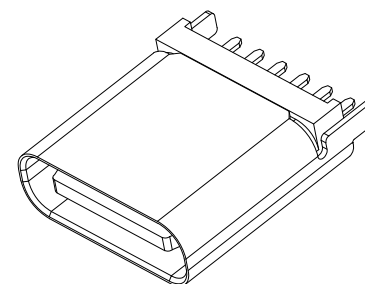




RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY,Ni30u"Min PLATED
2	CONTACT	6	C2680,TiN80u"/Au1u"/Ni30u" PLATED
3	1MD HOUSING	1	LCP UL94 V-0 BLACK

1材质:

1. 1胶芯: LCP UL94 V-0
1. 2端子: C2680, T=0.2mm; 镍底, 镀金
1. 3外壳: SUS201/304 表面镀镍
2. 电气特性:
 2. 1. 接触区: 接触电阻 $40\text{m}\Omega$ Max, 允许 $10\text{m}\Omega$ 变化量. 测试条件: 20mv , 100mA 下测量.
 2. 2. 接触电流: 3A VBUS引脚; 1.25A 用于GND引脚; 其他引脚为 0.25A .
 2. 3. 额定电压: 5V .
 2. 4. 耐电电压: 100VAC .
 2. 5. 绝缘电阻: 至少 100 兆欧 .
3. 机械性能:
 3. 1. 插入力: $0.5\text{--}2.0\text{Kg}$
 3. 2. 拔出力: $0.6\text{--}2.04\text{Kg}$
 3. 3. 插拔次数 **10000** 次.
 4. 工作环境: -20°C to $+85^{\circ}\text{C}$.
 5. 耐焊接热: 端子浸入 $250\pm 5^{\circ}\text{C}$ 的锡槽中; 历时 $3\text{--}5\text{S}\pm 0.5\text{Sec}$, 沾锡面积95%以上
 6. 外观: 部件可以承受以下焊接条件:
温度 250°C , 时间 $8\text{--}10$ 秒, 外观无损坏变形
 7. 包装: 盒装, 1000pcs 一盒 编带, 800pcs 一盘

料号编码

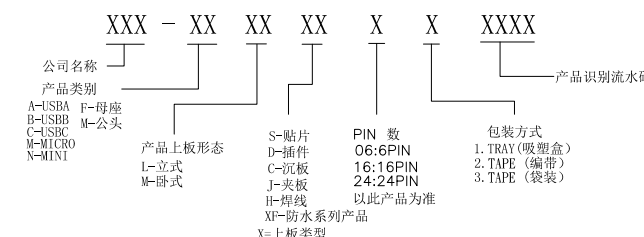

深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TYPE-C6P直插8.8 1.5脚

工程图

mm

WEB: <http://www.szzdjmkj.com/>

1:1

A4

 $1/2$