
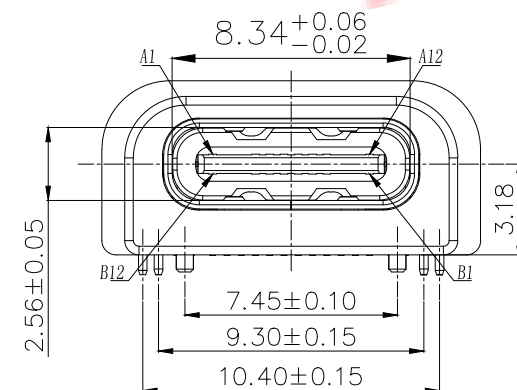
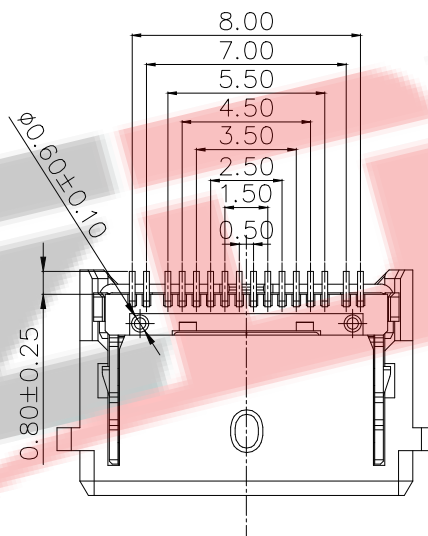
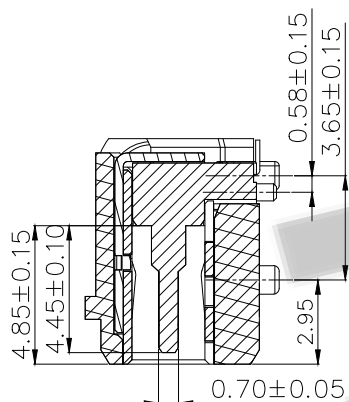
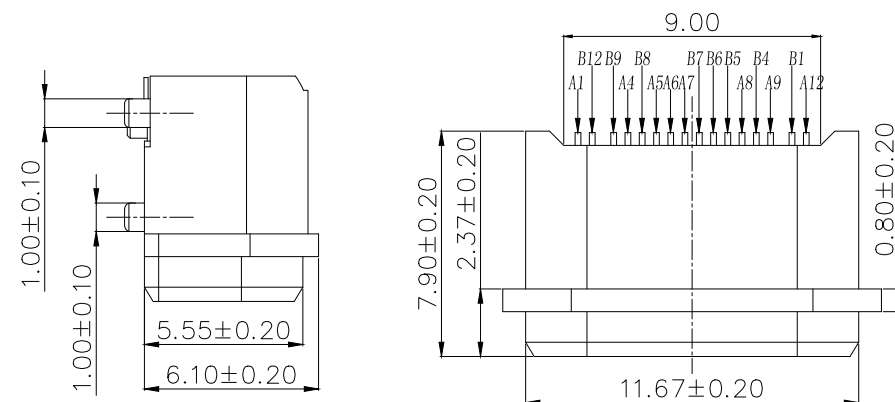


NOTES:

1. MECHANICAL: MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.

2. ELECTRICAL:
CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES

3. ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE -30° C ~ +80° C
4. Salt Spray: 24H

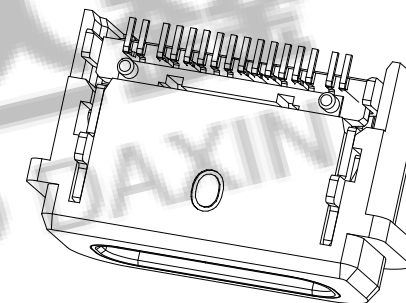

料号编码:

XXX - XX XX XX X X XXXX

公司名称
产品类别
A-USB A-母座
B-USB B-公头
C-USB C-插座
M-MICRO M-板式
N-MINI N-板式

产品上板形态
S-贴片
D-插件
C-沉板
J-夹板
H-焊线
X-防水系列产品
X=上板类型

PIN 数
06:6PIN
16:16PIN
24:24PIN
以此产品为准

包装方式
1. TRAY (吸塑盒)
2. TAPE (编带)
3. TAPE (袋装)

产品识别流水码



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

Type-C 16PIN板上型垫高3.18加防护套
垫高1.6 H=3.18

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.: ZDX-CFMS1620026

TEL: 0755-29888153

WEB: <http://www.szzdjmkj.com/>

SCALE:

1:1

SIZE:

A4

SHEET:

1/2