

1. 材料

- A. 主体: LCP, 黑色, 白色, UL 94-V0;
B. 端子: 铜合金, 电镀刷金;
C. 外壳: 不锈钢, 镀全镍;
D. 中夹片: 不锈钢。

2. 主要特性

- A. 电压等级: 20V AC;
B. 电流: 5A;
C. 工作温度: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$;


3. 电气要求:

- A. 接触电阻: $40\text{m}\Omega$ Max. (初始), $50\text{m}\Omega$ Max. (最后);
B. 电压: 100V AC 1分钟;
C. 绝缘电阻: $100\text{M}\Omega$ min. DC 500v;

4. 机械性能:

- A. 插入力: 5~20N. (从1~10,000次);
B. 拔出力: 8~20N. (从1~1,000次);
6~20N. (从1,001~10,000次);
C. 耐久性寿命: 10,000次;

料号编码:

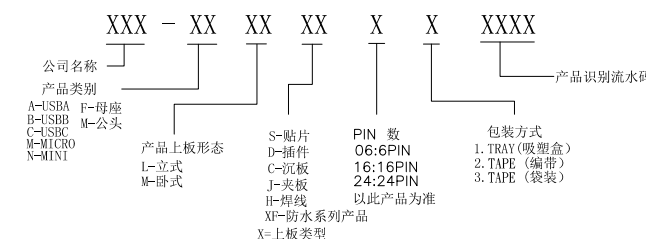

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE: TYPE-C16P母座
前贴后插L7.35脚长2.0

PART NO.: ZDX-CFMS1620040

TEL: 0755-29888153

WEB: <http://www.szzdjmkj.com/>

工程图

THIRD ANGLE PROJECTION

UNIT:

SCALE:

SIZE:






SHEET:

mm

1:1

A4

1/2

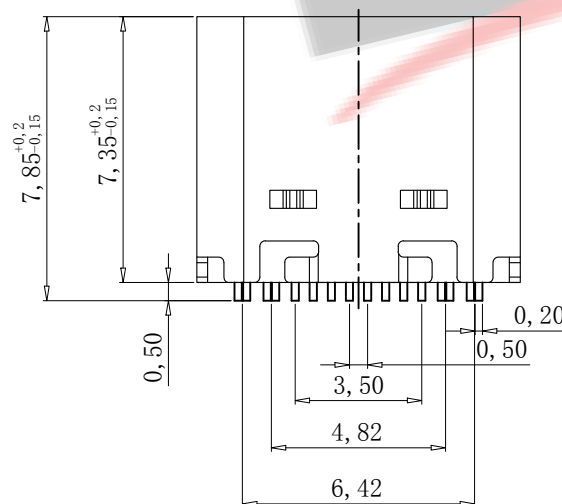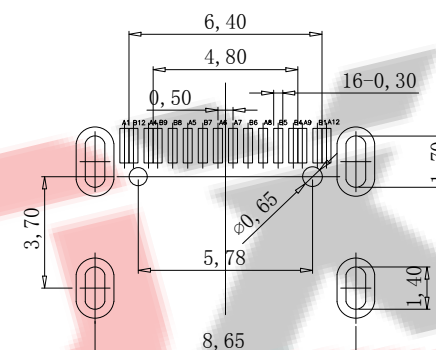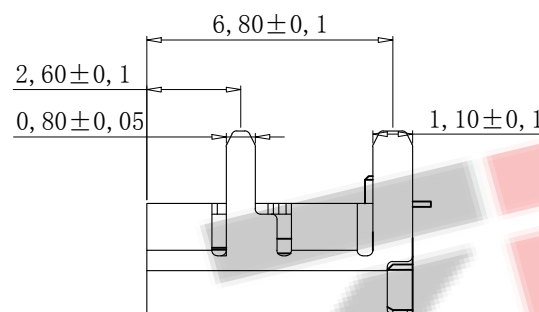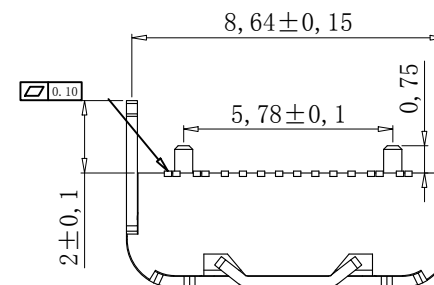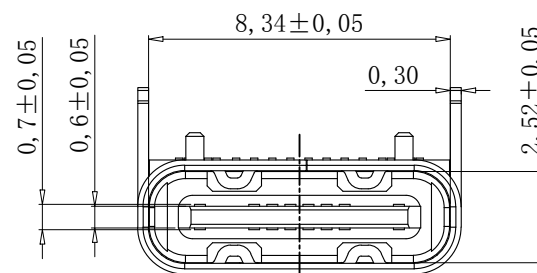

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME