

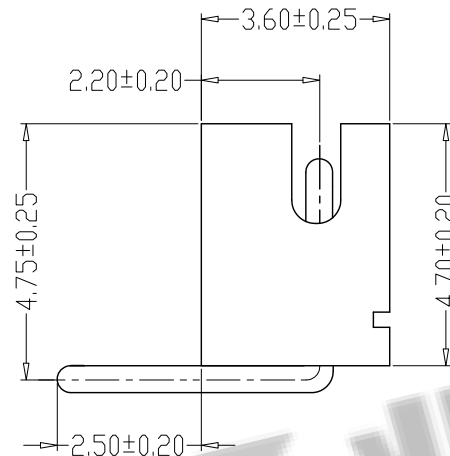
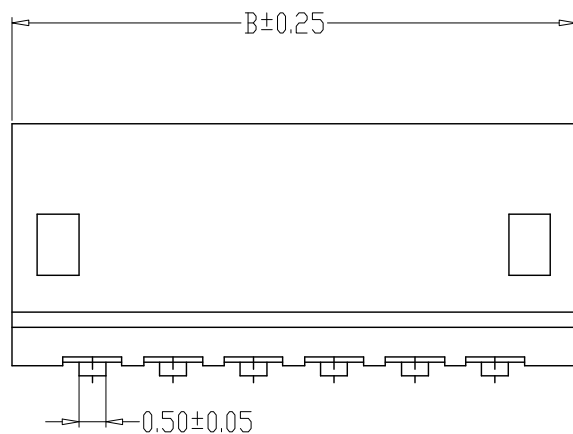


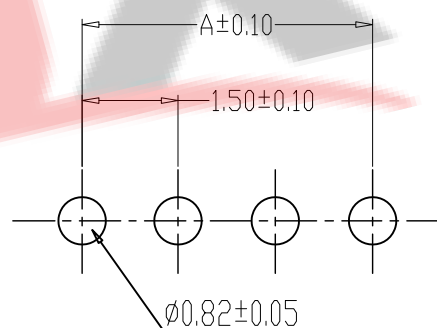

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 500MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer PBT/PA46 White/Beige, UL94V-0
PIN Brass Tin-plated

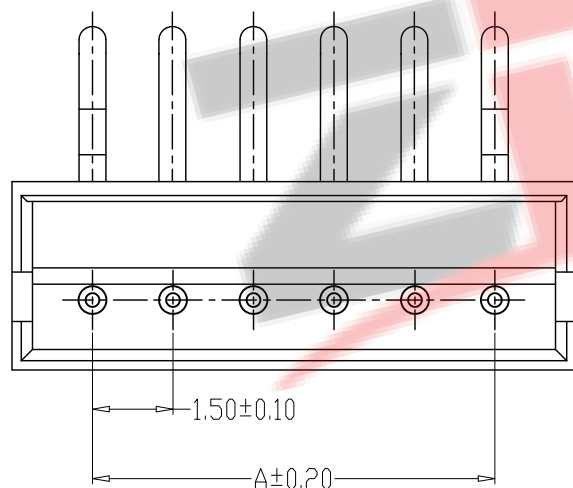

PCB LAYOUT

PIN=NAW	尺寸 (mm)	
	A	B
A1500-02AW	1.50	4.50
A1500-03AW	3.00	6.00
A1500-04AW	4.50	7.50
A1500-05AW	6.00	9.00
A1500-06AW	7.50	10.50
A1500-07AW	9.00	12.00
A1500-08AW	10.50	13.50
A1500-09AW	12.00	15.00
A1500-10AW	13.50	16.50
A1500-11AW	15.00	18.00
A1500-12AW	16.50	19.50
A1500-20AW	28.50	31.50

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENE RL TOLERANCE		制图 DRAWING	钱岳生	料号 PART NO.	ZDX-A1500-NAW	版本 REV.	A
			X.±0.25	X.±2°	审核	2021、05、03	品名	ZH弯针	页次	1/1
			.X±0.20	.X°±1°	CHECK	2021、05、04	TITLE	WAFER DIP TYPE	SHEET	
			.XX±0.15	.XX°±0.5°	核准	张名	客户料号			
			.XXX±0.10	.XXX°±0.5°	APPROVAL	2021、05、05	CUTM. NO.			
					单位 UNITS	MM	比例 SCALE	1:1	ZDX 深圳市兆达鑫科技有限公司 Shenzhen zhaodaxin Technology Co., Ltd	