
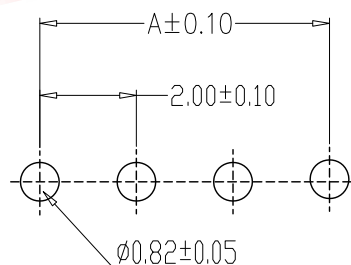


SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

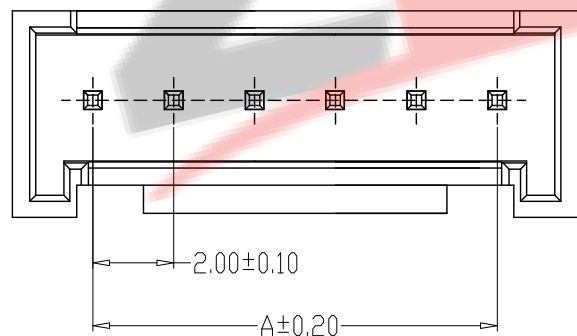

PCB LAYOUT

PIN=NA	尺寸 (mm)	
	A	B
A2006-02A	2.00	6.00
A2006-03A	4.00	8.00
A2006-04A	6.00	10.00
A2006-05A	8.00	12.00
A2006-06A	10.00	14.00
A2006-07A	12.00	16.00
A2006-08A	14.00	18.00
A2006-09A	16.00	20.00
A2006-10A	18.00	22.00
A2006-11A	20.00	24.00
A2006-12A	22.00	26.00
A2006-20A	38.00	42.00

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	钱岳生			料号 PART NO.	ZDX-A2006-NA		版本 REV.	A
			X.±0.25	X.*±2'	审核	2021、05、03	张名	品名	HY直针		页次	1/1	
			.X±0.20	.X'±1'	核准	2021、05、04	张名	TITLE	WAFER DIP TYPE		SHEET	1/1	
			.XX±0.15	.XX'±0.5'	核 准	2021、05、05	张名	客户料号 CUTM. NO.					
			.XXX±0.10	.XXX'±0.5'	APPROVAL	2021、05、05	张名						
					单位 UNITS	MM	比例 SCALE	1:1		深圳市兆达鑫科技有限公司 Shenzhen zhaodaxin Technology Co., Ltd			