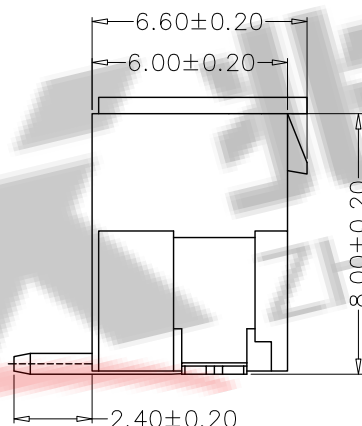
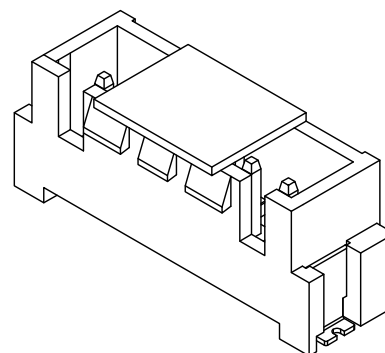
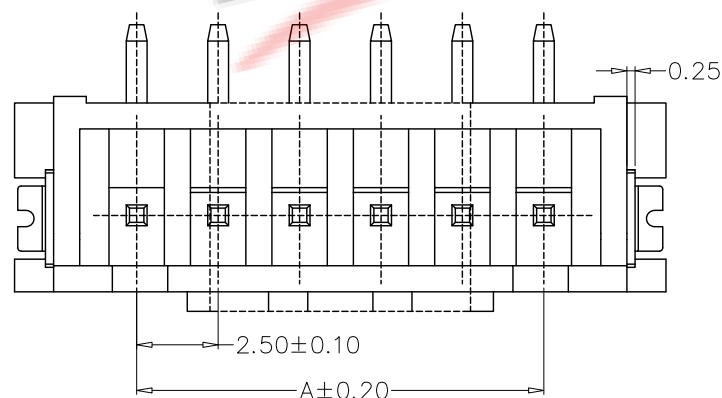
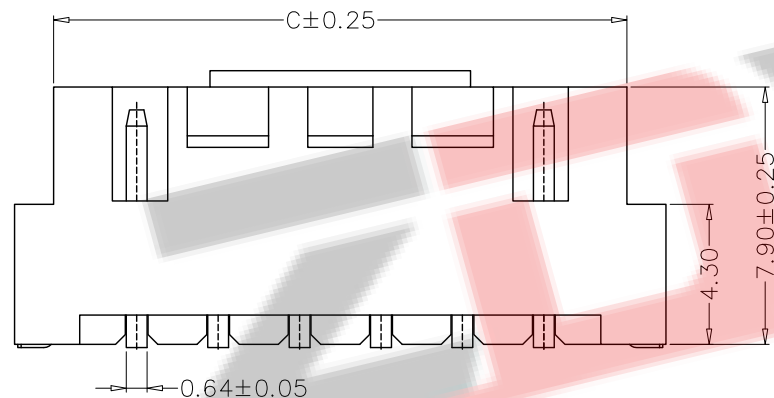
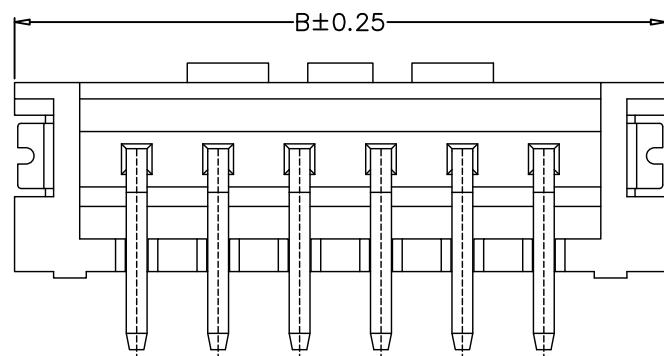


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltang: 1000V AC/minute
 - 7、Material: Wafer LCP、PA6T, UL94V-0
- PIN Brass Tin-plated
Solder tad Phosphoric bronze Tin-plated

PIN=NAB	尺寸 (mm)		
	A	B	C
A2504-02AB	2.50	10.00	7.50
A2504-03AB	5.00	12.50	10.00
A2504-04AB	7.50	15.00	12.50
A2504-05AB	10.00	17.50	15.00
A2504-06AB	12.50	20.00	17.50
A2504-07AB	15.00	22.50	20.00
A2504-08AB	17.50	25.00	22.50
A2504-09AB	20.00	27.50	25.00
A2504-10AB	22.50	30.00	27.50
A2504-11AB	25.00	32.50	30.00
A2504-12AB	27.50	35.00	32.50
A2504-20AB	47.50	55.00	52.50

GENERAL TOLERANCE		制 图 DRAWING	钱岳生 2017、06、01		料 号 PART NO.	ZDX-A2504-NAB	版 本 REV.	A
X.±0.25	X.±2°	审 核 CHECK	张 名 2017、06、03		品 名 TITLE	HA立贴 WAFER SMT TYPE	页 次 SHEET	1/1
.X±0.20	.X±1°	核 准 APPROVAL	张 名 2017、06、05		客户料号 CUTM. NO.	 深圳市兆达鑫科技有限公司 Shenzhen zhaodaxin Technology Co., Ltd		
.XX±0.15	.XX±0.5°							
.XXX±0.10	.XXX±0.5°	单 位 UNITS	MM	比 例 SCALE	1:1			