

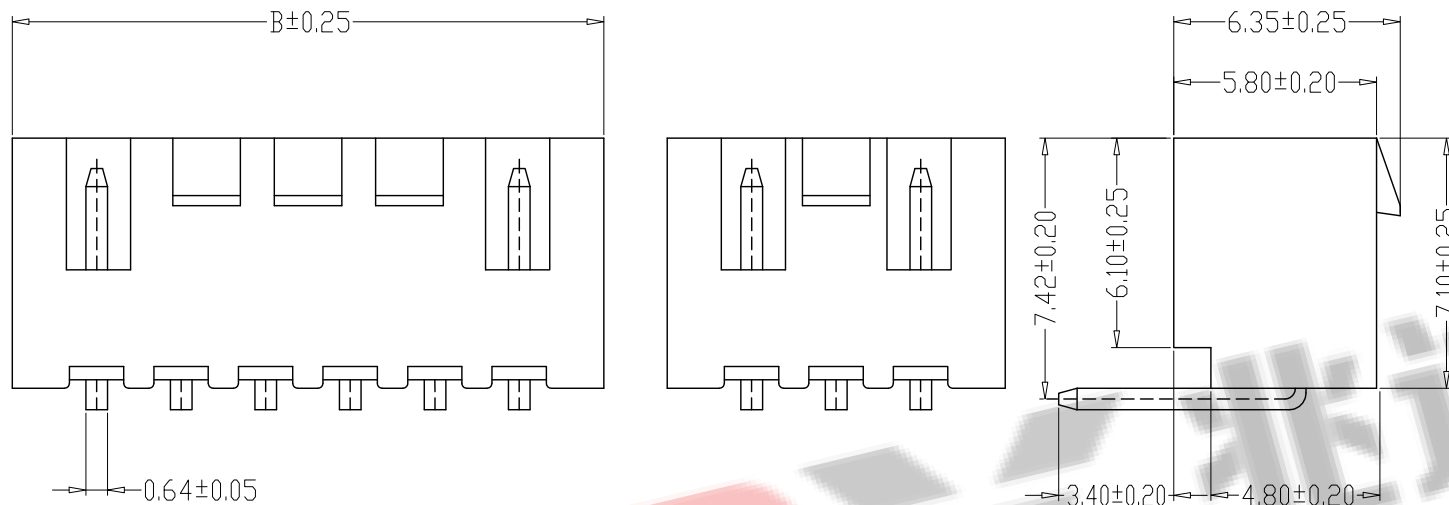


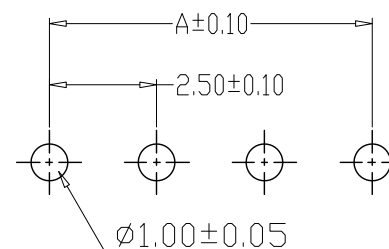

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer Nylon46, Beige UL94V-0
PIN Brass Tin-plated

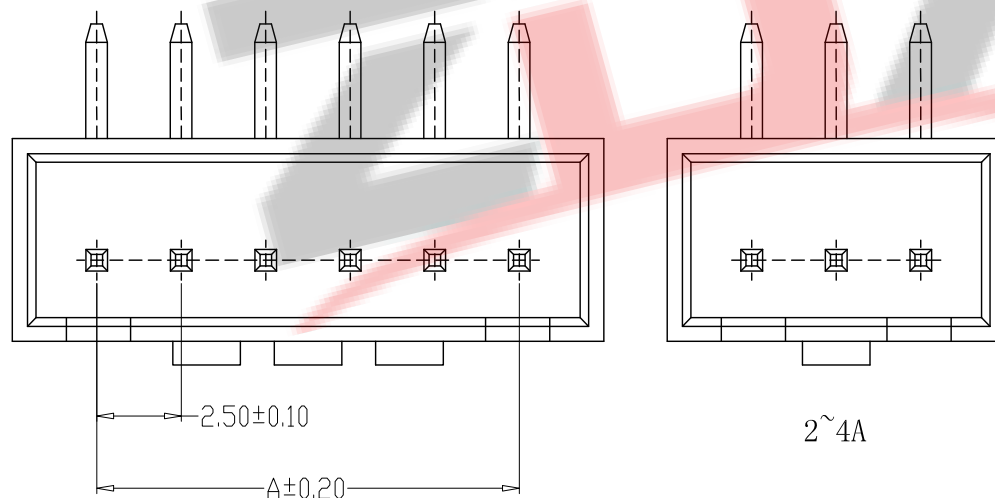

PCB LAYOUT

PIN=NAW	尺寸 (mm)	
	A	B
A2504-02AW	2.50	7.50
A2504-03AW	5.00	10.00
A2504-04AW	7.50	12.50
A2504-05AW	10.00	15.00
A2504-06AW	12.50	17.50
A2504-07AW	15.00	20.00
A2504-08AW	17.50	22.50
A2504-09AW	20.00	25.00
A2504-10AW	22.50	27.50
A2504-11AW	25.00	30.00
A2504-12AW	27.50	32.50
A2504-20AW	47.50	52.50

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERL TOLERANCE		制 图 DRAWING	钱岳生			料 号 PART NO.	ZDX-A2504-NAW		版 本 REV.	A
			X±0.25	X'±2°	审 核	2021、05、03			品 名	HA弯针		页 次	1/1
					CHECK	2021、05、04	客 户 料 号	WAFER DIP TYPE	CUTM. NO.				
.X±0.20	.X'±1°	核 准	张 名										
.XX±0.15	.XX'±0.5°	APPROVAL	2021、05、05			ZDX 深圳市兆达鑫科技有限公司							
.XXX±0.10	.XXX'±0.5°	单 位 UNITS	MM	比 例 SCALE	1:1	Shenzhen zhaodaxin Technology Co., Ltd							