
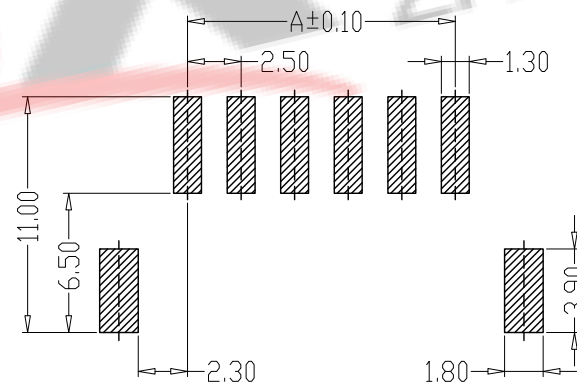
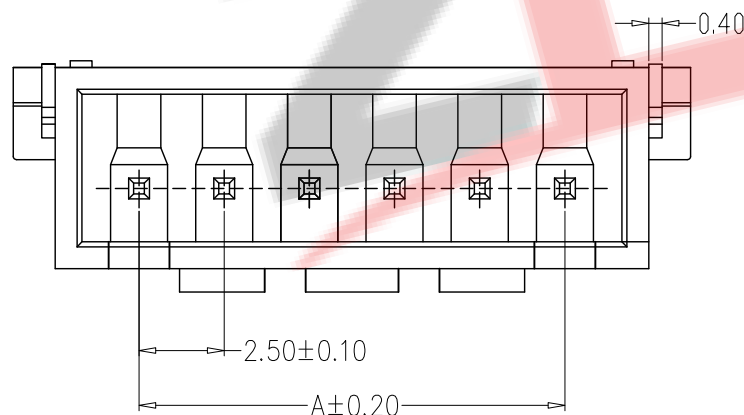
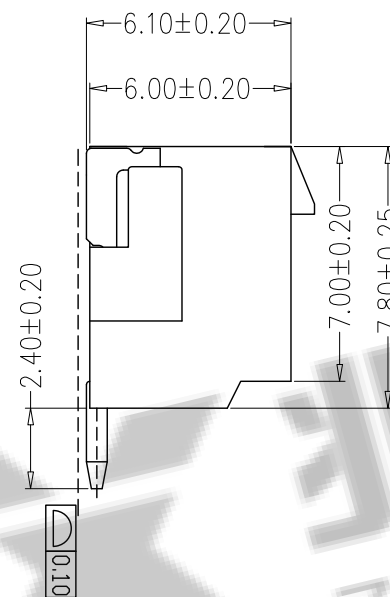


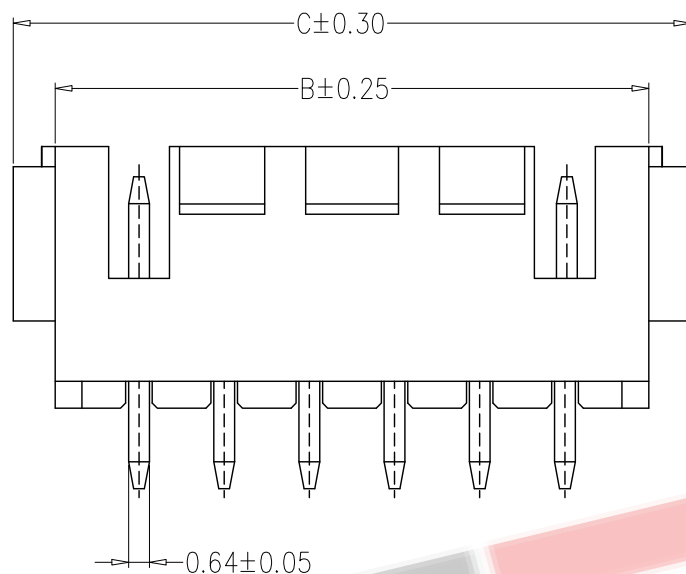

PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltang: 1000V AC/minute
 - 7、Material: Wafer LCP, UL94V-0
- PIN Brass Tin-plated
Solder tad Brass Tin-plated

PIN=NAWB	尺寸 (mm)		
	A	B	C
A2504-02AWB	2.50	7.50	10.00
A2504-03AWB	5.00	10.00	12.50
A2504-04AWB	7.50	12.50	15.00
A2504-05AWB	10.00	15.00	17.50
A2504-06AWB	12.50	17.50	20.00
A2504-07AWB	15.00	20.00	22.50
A2504-08AWB	17.50	22.50	25.00
A2504-09AWB	20.00	25.00	27.50
A2504-10AWB	22.50	27.50	30.00
A2504-11AWB	25.00	30.00	32.50
A2504-12AWB	27.50	32.50	35.00

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENE RL TOLERANCE		制图 DRAWING	钱岳生 2013、07、01	料号 PART NO.	ZDX-A2504-NAWB	版本 REV.	A
			X±0.25	X'±2°	审核 CHECK	张名 2013、07、03	品名 TITLE	HA卧贴 WAFER SMT TYPE	页次 SHEET	1/1
			.XX±0.15	.XX'±0.5°	核准 APPROVAL	张名 2013、07、05	客户料号 CUTM. NO.			
			.XXX±0.10	.XXX'±0.5°	单位 UNITS	MM	比例 SCALE	1:1	ZDX 深圳市兆达鑫科技有限公司 Shenzhen zhaodaxin Technology Co., Ltd	