
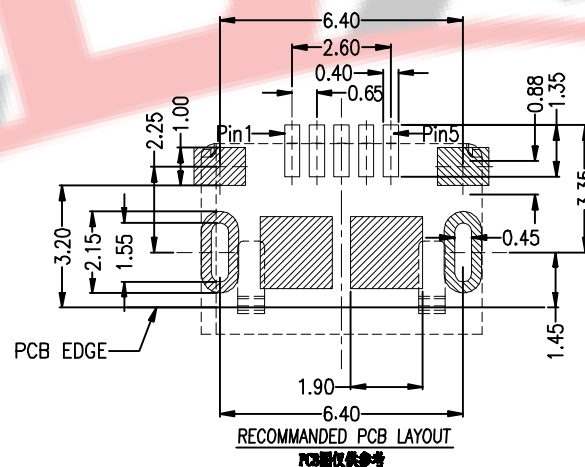
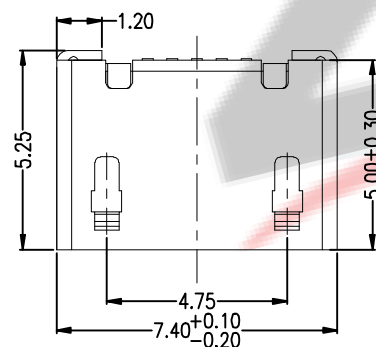
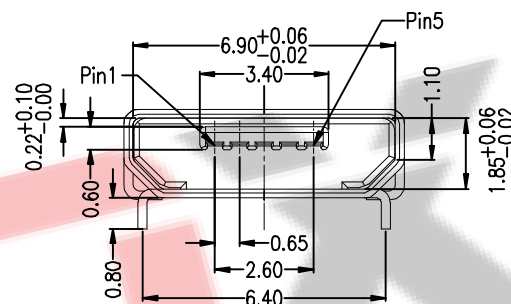
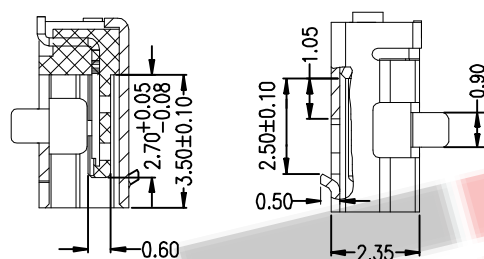
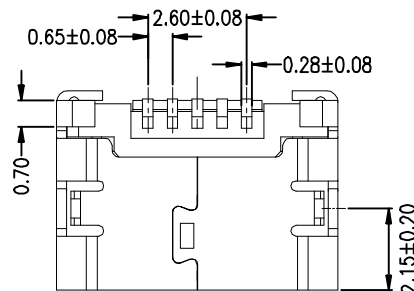


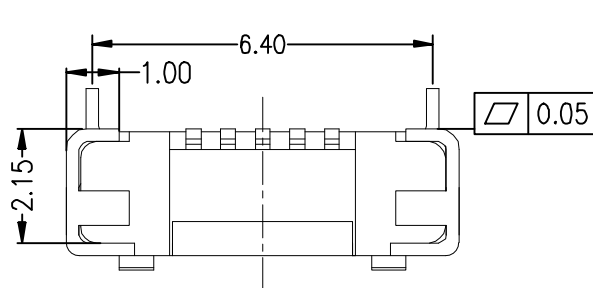

MICRO USB B TYPE PIN ASSIGNMENTS

PIN NUMBER	1	2	3	4	5
SIGNAL NAME	VBUS	D-	D+	ID	GND

备注:

1.产品规格:

1-1.插入力:35N MAX.

1-2.拔出力:10N MIN.INITIAL 8-20N AFTER

1-3.额定电流:1.0A

1-4.额定电压:30V

1-5.耐久性:10000CYCLES MIN.1-6.耐电压:100V AC MIN.

1-7.接触阻抗:30mΩ MAX.INITIAL;40mΩ MAX AFTER

1-8.绝缘电阻:100MQ MIN1-9.工作温度:-30° T0+80°

2.材质:

2.1胶芯:LCPUL94V-0

2.2端子:C2680R-H,镍底, 镀金1U"

2.3外壳:SUS201/301, 表面镀雾锡/镀镍

3.重点尺寸标识"▲"符号

料号编码:

XXX	-	XX	XX	XX	X	X	XXXX
母座		产品上板形态	S-贴片 D-插件 C-沉板 J-夹板 H-焊线 XF-防水产品 X=上板类型	PIN 数 06:6PIN 16:16PIN 24:24PIN 以此产品为准	包装方式 1. TRAY (吸塑盒) 2. TAPE (编带) 3. TAPE (袋装)		产品识别流水码



深圳市兆达鑫科技有限公司


Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

MICRO 5P间距6.4插板直边

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.: ZDX-MFMS05MC36

TEL: 0755-29888153

WEB: <http://www.szzdjmkj.com/>

SCALE:

1:1

SIZE:

A4

SHEET:

1/2