

RoHS Compliant Halogen Free





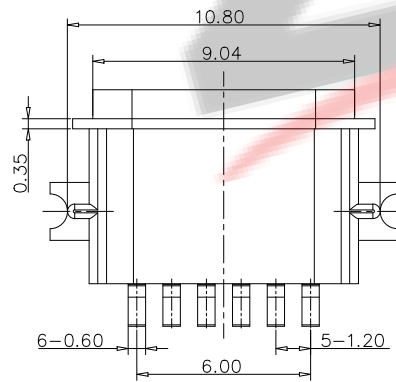


TABLE:			
NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY, NI30u"Min PLATED
2	CONTACT	6	C2680, TIN80u"/Au1u"/Ni30u" PLATED
3	1MD HOUSING	1	LCP UL94 V-0 BLACK
4	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

USB TYPE C PIN ASSIGNMENTS			
PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

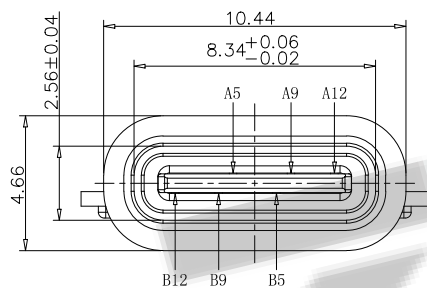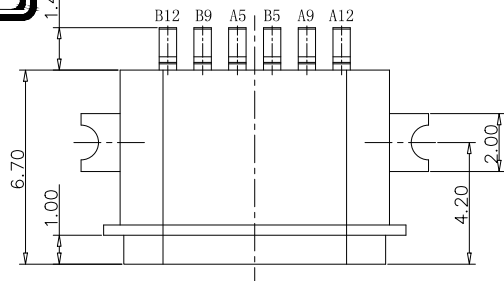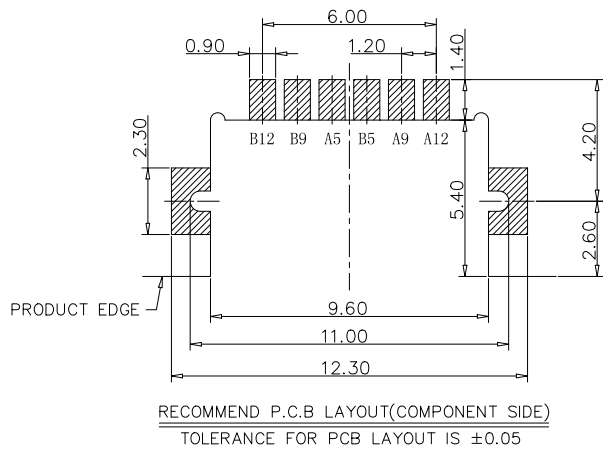

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

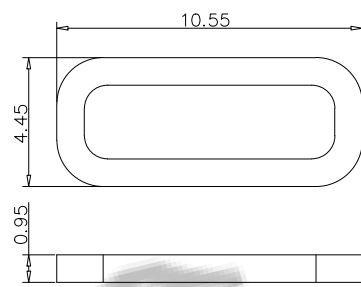

防水圈图


备注 (NOTE):

1. 电气特性:


1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
1. 2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
1. 3. 额定电压: 5V.
1. 4. 耐电压: 100VAC.
1. 5. 绝缘电阻: 至少100兆欧 .

2. 机械性能:

3. 1. 插入力: 0.5-2.0Kg
3. 2. 拔出力: 0.6-2.04Kg
3. 3. 插拔次数: 10000次.
4. 可焊性: 温度210-230℃, 时间10秒.
5. 工作环境: -20℃ to +85℃.

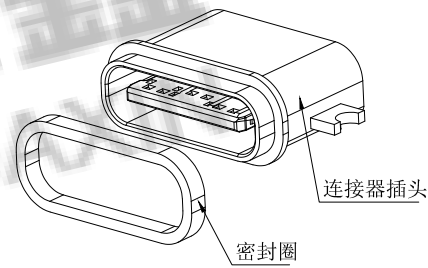


料号编码:


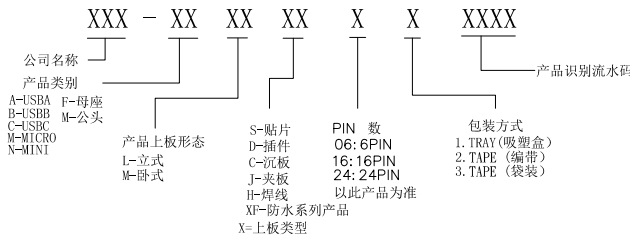


ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd


TITLE: TYPE C 6P 沉板0.8防水母座L=6.7mm(外壳锌合金) 工程图		PART NO.: ZDX-CFMCF062AL10		
		TEL: 0755-29888153		
		WEB: http://www.szzdjmj.com/		
THIRD ANGLE PROJECTION 	UNIT: mm	SCALE: 1:1	SIZE: A4	SHEET: 1/2

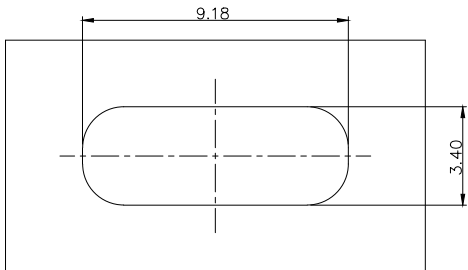


密封开孔参考尺寸(只供参考)
组装外壳时需要打环保润滑油

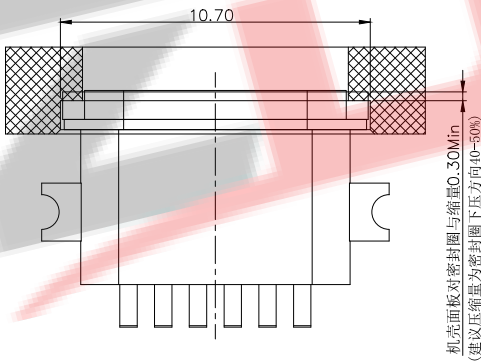


料号编码:



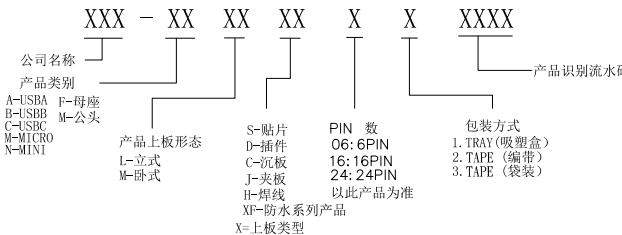


 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE: 直压密封建议尺寸 工程图		PART NO.: ZDX-CFMCF062AL10		
		TEL:0755-29888153		
		WEB: http://www.szzdjmkj.com/		
THIRD ANGLE PROJECTION 	UNIT:	SCALE:	SIZE:	SHEET:
	mm	1:1	A4	1/2

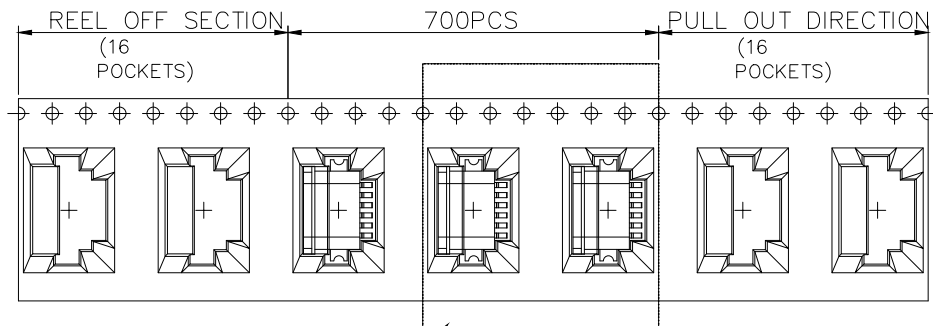

SEE DETAIL X

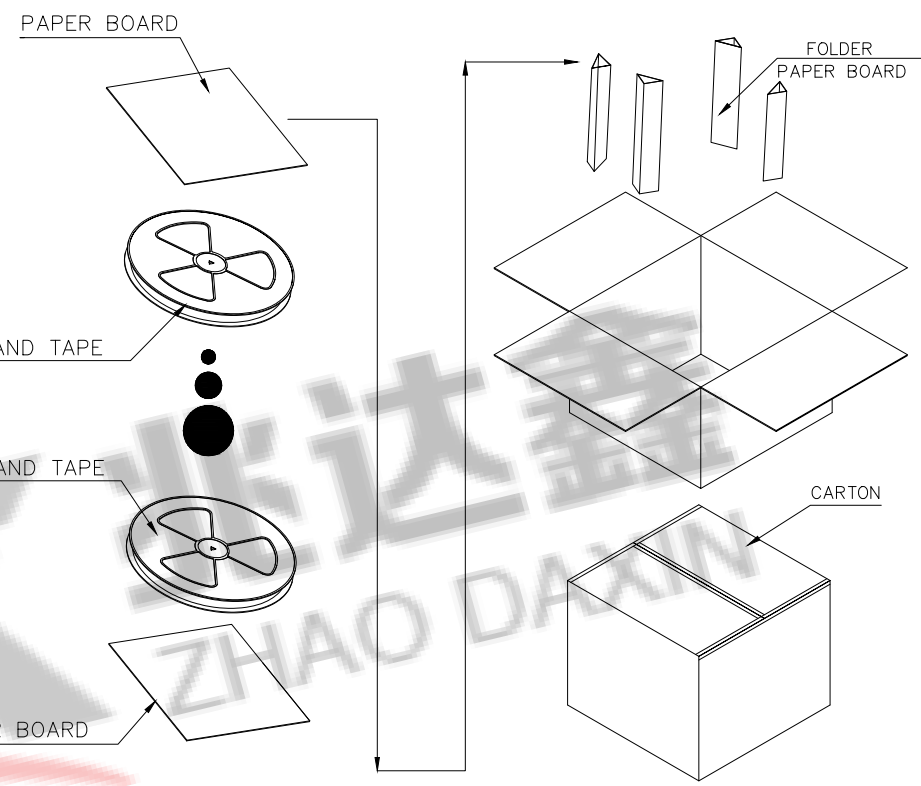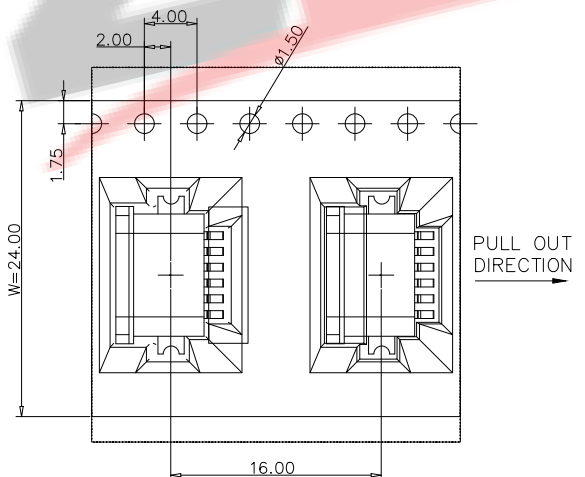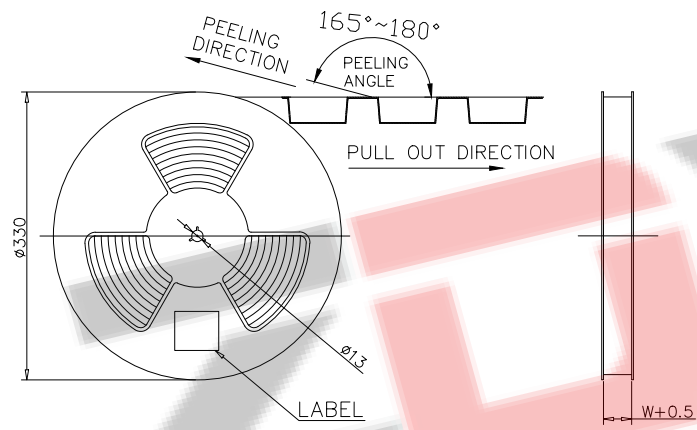

	REEL	CARTON
CONNECTOR (PCS)	700	7000

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE: TYPE C 6P 沉板系列防水母座(外壳锌合金)-包装规范 工程图		PART NO.: ZDX-CFMCF062AL10		
		TEL: 0755-29888153		
		WEB: http://www.szzdjmkj.com/		
THIRD ANGLE PROJECTION 	UNIT:	SCALE:	SIZE:	SHEET:
	mm	1:1	A4	1/2