

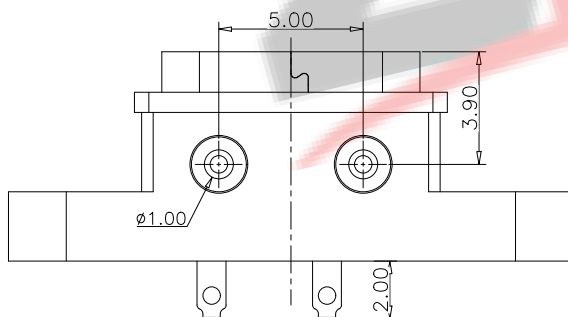
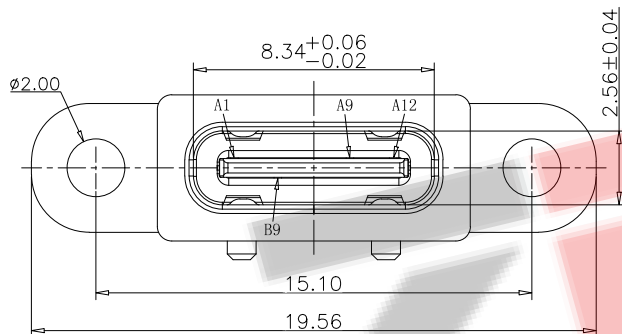


RoHS Compliant

Halogen Free

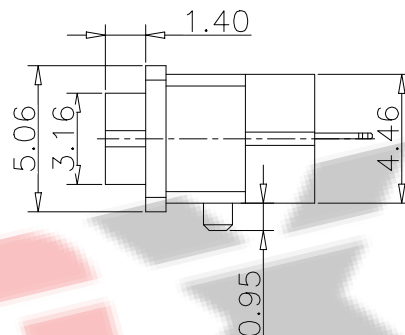


GND VBUS

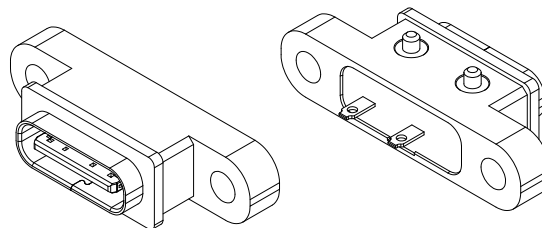

PIN ASSIGNMENT:

PIN NO	A1&A12	A9&B9
SIGNAL NAME	GND	VBUS



防水圈图示

备注 (NOTE):

1. 电气特性:

1.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.

1.2. 接触电流: 3A最大.

1.3. 额定电压: 30V.

1.4. 耐电压: 100VR. M. S.

1.5. 绝缘电阻: 至少100兆欧.

2. 机械性能:

3.1. 插入力: 0.51-2.04Kg

3.2. 拔出力: 0.82-2.04Kg

3.3. 耐久性: 0.61-2.04Kg


3.4. 插拔次数: 10000次.

4. 工作环境: -20℃ to +85℃.

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL, Ni PLATED 30u"Min
2	CONTACT	4	COPPER STEEL, Ni 50u"Min; Au u"
3	MID PLATE	1	STAINLESS STEEL, NO PLATING
4	MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
5	PLASTIC SHELL	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

料号编码:

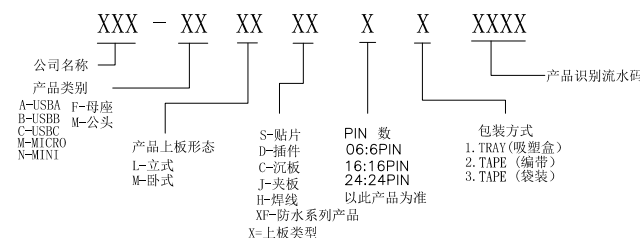

深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE C 2P焊线式防水母座L=7.25

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.: ZDX-CFMHF022AL01

TEL: 0755-29888153

WEB: <http://www.szzdjmkj.com/>

SCALE:

1:1

SIZE:

A4

SHEET:

1/2