

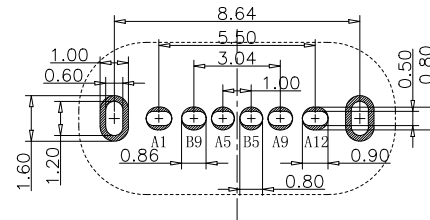
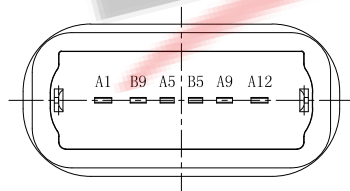
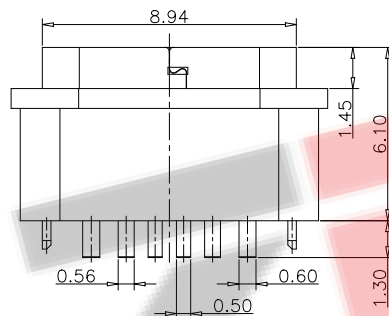
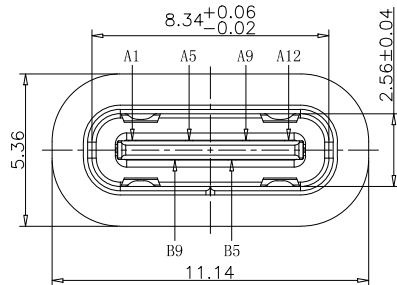


RoHS Compliant

Halogen Free



RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05



备注 (NOTE):

1. 电气特性:

1.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.

1.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.

1.3. 额定电压: 5V.

1.4. 耐电电压: 100VAC.

1.5. 绝缘电阻: 至少100兆欧.

2. 机械性能:

3.1. 插入力: 0.5-2.0Kg

3.2. 拔出力: 0.6-2.04Kg

3.3. 插拔次数: 10000次.

4. 可焊性: 温度210-230℃, 时间10秒.

5. 工作环境: -20℃ to +85℃.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B9	VBUS
A5	CC1	B5	CC2
A9	VBUS		
A12	GND		

料号编码:

XXX	-	XX	XX	XX	X	X	XXXX
公司名称							产品识别流水码
产品类别							
A-USB A F-母座							
B-USB B M-公头							
C-USB C							
M-MICRO							
N-MINI							
产品上板形态							
L-立式							
M-卧式							
S-贴片							
D-插件							
C-沉板							
J-夹板							
H-焊线							
XP-防水系列产品							
X=上板类型							
PIN 数							
06:6PIN							
16:16PIN							
24:24PIN							
以此产品为准							
包装方式							
1. TRAY (吸塑盒)							
2. TAPE (编带)							
3. TAPE (袋装)							

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL, NI PLATED
2	CONTACT	6	COPPER STEEL, TIN/Au/Ni PLATED
3	1MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
4	2MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0



深圳市兆达鑫科技有限公司


Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE C 6P 防水母座立式插板H=6.0mm

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.: ZDX-CFLDF062AL01

TEL: 0755-29888153

WEB: <http://www.szzdjmkj.com/>

SCALE:

1:1

SIZE:

A4

SHEET:

1/2