
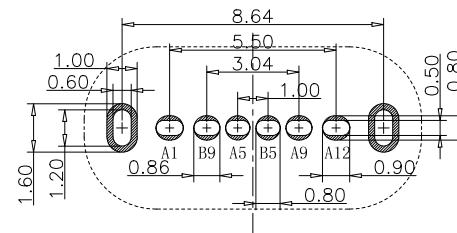

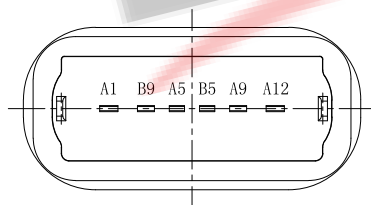
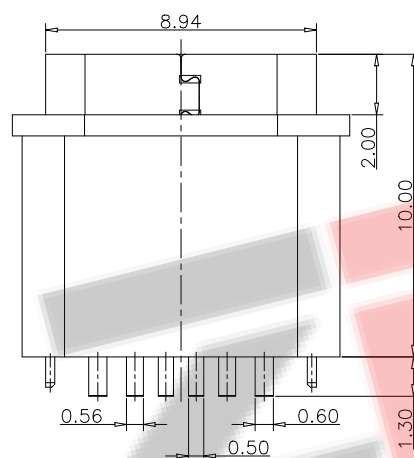


RoHS Compliant

Halogen Free

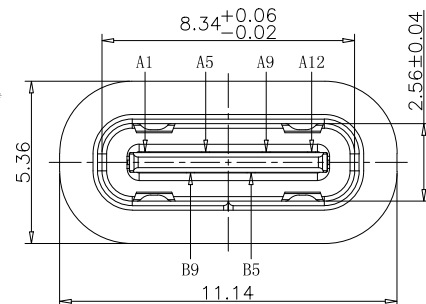

RECOMMEND P.C.B. LAYOUT (COMPONENT SIDE)  
TOLERANCE FOR PCB LAYOUT IS  $\pm 0.05$

customer drawing

备注 (NOTE):

1. 电气特性:

1.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.

1.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.

1.3. 额定电压: 5V.

1.4. 耐电电压: 100VAC.

1.5. 绝缘电阻: 至少100兆欧.

2. 机械性能:

3.1. 插入力: 0.5-2.0Kg

3.2. 拔出力: 0.6-2.04Kg

3.3. 插拔次数: 10000次.

4. 可焊性: 温度210-230℃, 时间10秒.

5. 工作环境: -20℃ to +85℃.

USB TYPE C PIN ASSIGNMENTS

| PIN NUMBER | SIGNAL NAME | PIN NUMBER | SIGNAL NAME |
|------------|-------------|------------|-------------|
| A1         | GND         | B9         | VBUS        |
| A5         | CC1         | B5         | CC2         |
| A9         | VBUS        |            |             |
| A12        | GND         |            |             |

料号编码:

XXX - XX XX XX X X XXXX

公司名称  
产品类别  
A-USB A-母座  
B-USB B-公头  
C-USB C-母座  
M-MICRO M-公头  
N-MINI N-母座  
产品上板形态  
L-立式  
M-卧式  
S-贴片  
D-插件  
C-沉板  
J-夹板  
H-焊线  
XF-防水系列产品  
X=上板类型  
PIN 数  
06:6PIN  
16:16PIN  
24:24PIN  
以此产品为准  
包装方式  
1. TRAY (吸塑盒)  
2. TAPE (编带)  
3. TAPE (袋装)

TABLE:

| NO | PART        | Q'TY | Material                                          |
|----|-------------|------|---------------------------------------------------|
| 1  | SHELL       | 1    | STAINLESS STEEL, NI PLATED                        |
| 2  | CONTACT     | 6    | COPPER STEEL, TIN/Au/Ni PLATED                    |
| 3  | 1MD HOUSING | 1    | HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0 |
| 4  | 2MD HOUSING | 1    | HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0 |



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE C 6P 防水母座立式插板H=10.0mm


PART NO.: ZDX-CFLDF062AL04

TEL: 0755-29888153

工程图

WEB: <http://www.szzdjmkj.com/>

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/2