
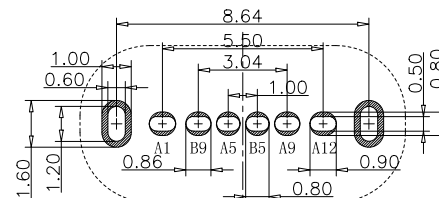


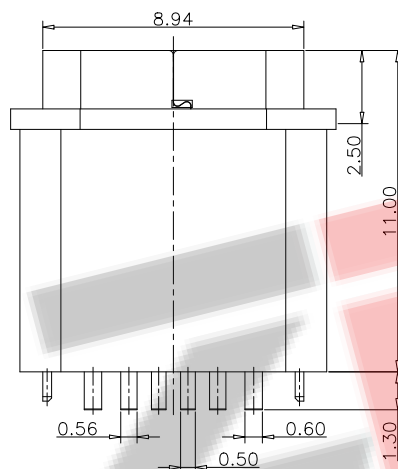


RoHS Compliant

Halogen Free

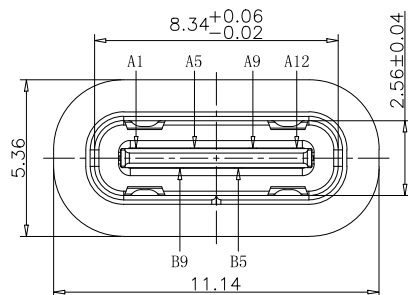

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

customer drawing

备注 (NOTE):

1. 电气特性:

1.1. 接触区: 接触电阻 $40m\Omega$ Max, 允许 $10m\Omega$ 变化量. 测试条件: $20mv$, $100mA$ 下测量.

1.2. 接触电流: $3A$ VBUS引脚; $1.25A$ 用于GND引脚; 其他引脚为 $0.25A$.

1.3. 额定电压: $5V$.

1.4. 耐电压: $100VAC$.

1.5. 绝缘电阻: 至少 100 兆欧.

2. 机械性能:

3.1. 插入力: $0.5-2.0Kg$

3.2. 拔出力: $0.6-2.04Kg$

3.3. 插拔次数: 10000 次.

4. 可焊性: 温度 $210-230^{\circ}C$, 时间 10 秒.

5. 工作环境: $-20^{\circ}C$ to $+85^{\circ}C$.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND		
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

料号编码:

XXX - XX XX XX X X XXXX

公司名称
产品类别
A-USB A-母座
B-USB B-公头
C-USB C-沉板
M-MICRO M-卧式
N-MINI
产品上板形态
S-贴片
D-插件
C-沉板
J-夹板
H-焊线
XF-防水系列产品
X=上板类型
PIN 数
06:6PIN
16:16PIN
24:24PIN
以此产品为准
包装方式
1. TRAY (吸塑盒)
2. TAPE (编带)
3. TAPE (袋装)

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL, NI PLATED
2	CONTACT	6	COPPER STEEL, TIN/Au/Ni PLATED
3	1MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
4	2MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0



深圳市兆达鑫科技有限公司


Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE C 6P 防水母座立式插板H=11.0mm

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.: ZDX-CFLDF062AL06

TEL: 0755-29888153

WEB: <http://www.szzdjmkj.com/>

SCALE:

1:1

SIZE:

A4

SHEET:

1/2