

RoHS Compliant

Halogen Free

customer drawing

备注:

1. 材质:

1.1胶芯: LCP+30%G.F UL94V-0

1.2端子: 磷铜, T=0.15mm; 镍底80 μ ", 镀金1 μ "1.3接地片: 不锈钢, T=0.15mm; 表面镀镍50 μ "1.4外壳: 不锈钢, T=0.30mm; 表面镀镍100 μ "

2. 主要特性:

2.1额定电流: 3.0A

2.2接触阻抗: 40m Ω MAX2.3绝缘阻抗: 100M Ω MIN 250V DC

2.4耐压测试: 100V AC

2.5沾锡性: 温度250 $\pm$ 5 $^{\circ}$ C, 时间5 $\pm$ 0.5s

2.6整体插入力: 2.0kgf MAX

整体拔出力: 0.6kgf MIN

2.7使用寿命: 10000次

2.8工作温度: -30 $^{\circ}$ C $\sim$ +80 $^{\circ}$ C

料号编码:

XXX - XX XX XX X X XXXX

公司名称

产品类别

A-USBA F-母座
B-USBB M-公头
C-USBC
M-MICRO
N-MINI1

产品上板形态

L-立式
M-卧式

S-贴片

D-插件

C-沉板

J-夹板

H-焊线

XF-防水系列产品

X=上板类型

PIN 数

06:6PIN

16:16PIN

24:24PIN

以此产品为准

包装方式

1. TRAY (吸塑盒)

2. TAPE (编带)

3. TAPE (袋装)

产品识别流水码



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE C5.8 款夹板0.8 母座成品

PART NO.:ZDX-CFLJ242ZC01

TEL:0755-29888153

工程图

WEB: <http://www.szzdjmj.com/>

THIRD ANGLE PROJECTION

UNIT:

mm

SCALE:


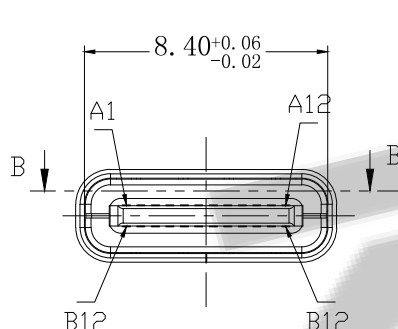

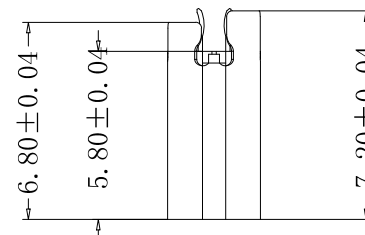
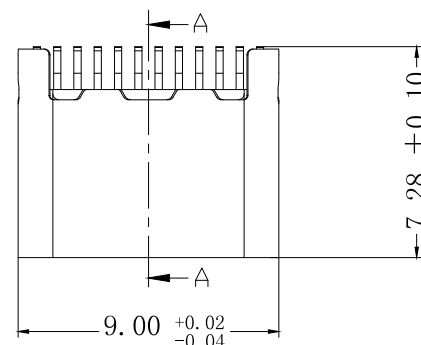

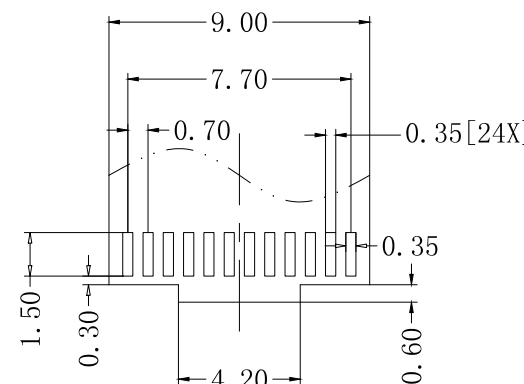
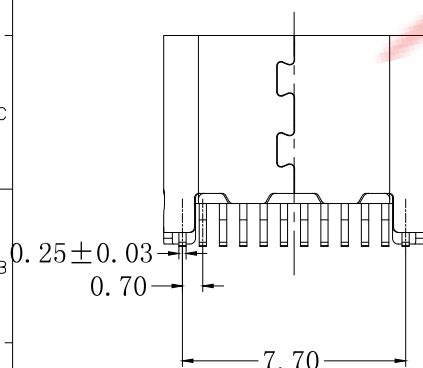

1:1

SIZE:

A4

SHEET:

1/2

4.20 $\pm$ 0.10RECOMMENDED P.C.B. LAYOUT
T=0.8 $\pm$ 0.05mm