

RoHS Compliant

Halogen Free

customer drawing

NOTES: 1.MATERIAL:

MOLDING: LCP UL94 V-0

CONTACT: COPPER ALLOY.

PLATED GOLD ON CONTACT AREA,
G/F GOLD ON SOLDER AREA,
50u" NICKEL PLATING OVER ALL.

SHELL: SUS304-H,T=0.30±0.03mm

50u" NICKEL PLATING OVER ALL.

EMI SHIELD: SUS304-H,T=0.12±0.03mm

LATCH: SUS301-H,T=0.15±0.03mm

2.MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N.

DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 5A MAX FOR VBUS;

1.25A FOR GND, 0.25A FOR OTHER OTHER.

VOLTAGE: 20VDC MAX



WITHSTANDING VOLTAGE: 100V AC.

CONTACT RESISTANCE: 40mΩ MAX.


INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +80°C

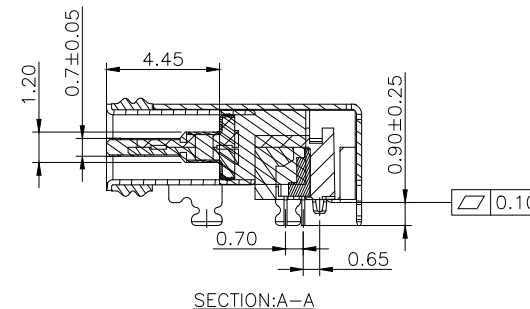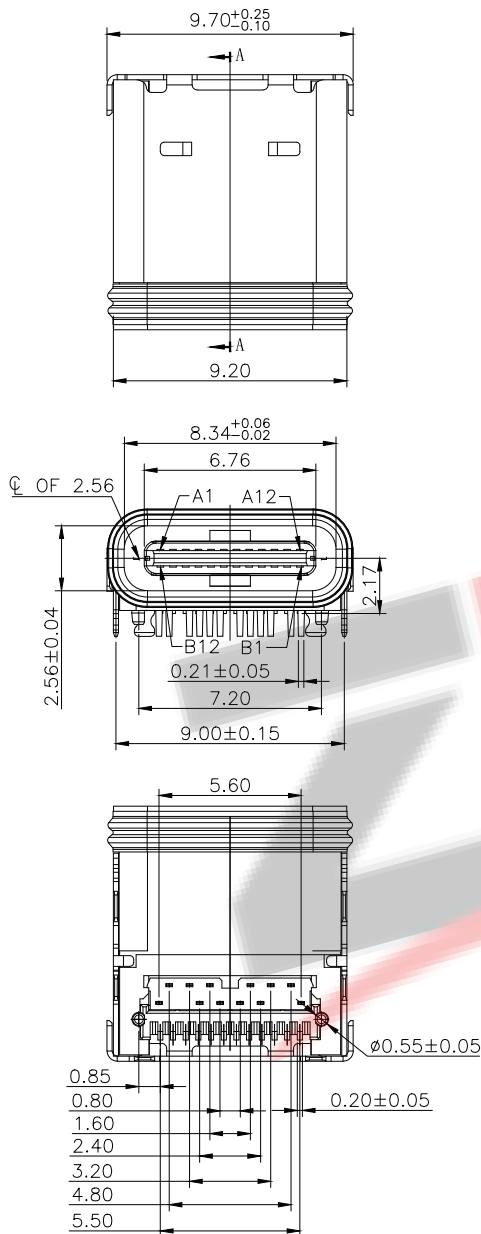

SECTION:A-A



料号编码:

XXX - XX XX XX X X XXXX

公司名称

产品类别

A-USB A F-母座

B-USB B M-公头

C-USB C

M-MICRO

N-MINI

产品上板形态

L-立式

M-卧式

S-贴片

D-插件

C-沉板

J-夹板

H-焊线

XF-防水系列产品

X=上板类型

PIN 数

06:6PIN

16:16PIN

24:24PIN

以此产品为准

包装方式

1. TRAY (吸塑盒)

2. TAPE (编带)

3. TAPE (袋装)

产品识别流水码



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE-C 24Pin板上DIP+SMT防水IPX8防水母座


PART NO.: ZDX-CFMDS242CY17

TEL: 0755-29888153

工程图

WEB: <http://www.szzdjmj.com/>

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:



A4

SHEET:

1/2

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	VBUS	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuraation Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

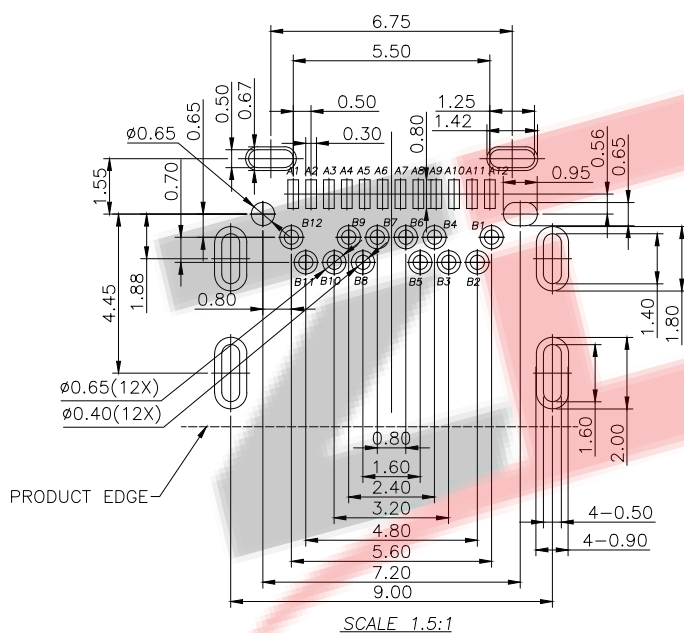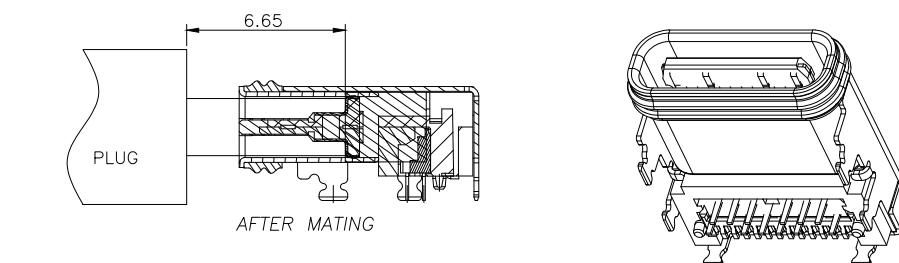

SCALE 1.5:1

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.0 MM;DEFAULT TOLERANCE:±0.05



深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE-C 24Pin板上DIP+SMT防水IPX8防水母座


PART NO.:ZDX-CFMDS242CY17

TEL:0755-29888153

工程图

WEB: <http://www.szzdjmj.com/>

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4


SHEET:

1/2



RoHS Compliant

Halogen Free

customer drawing

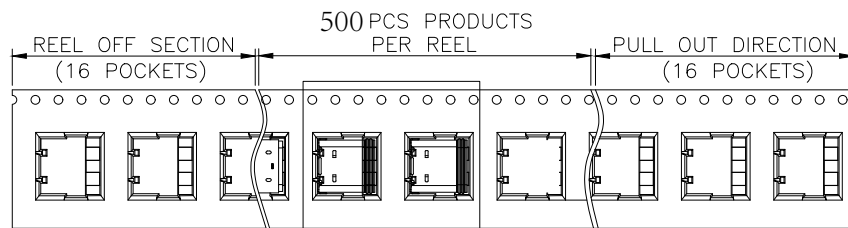


SEE DETAIL X

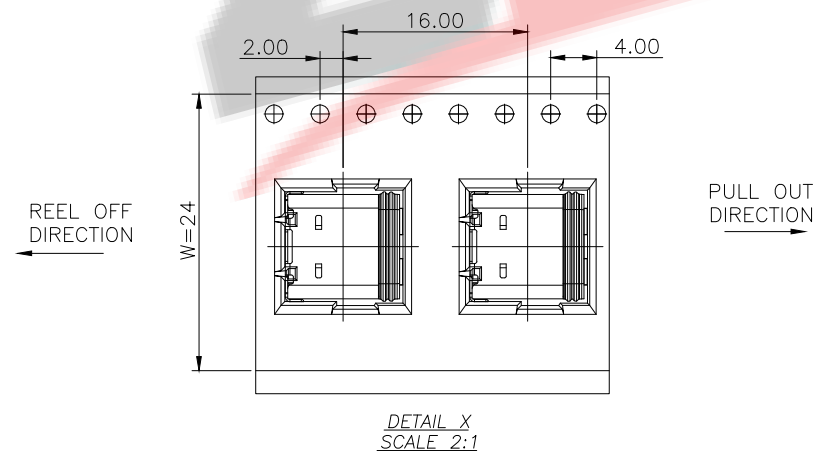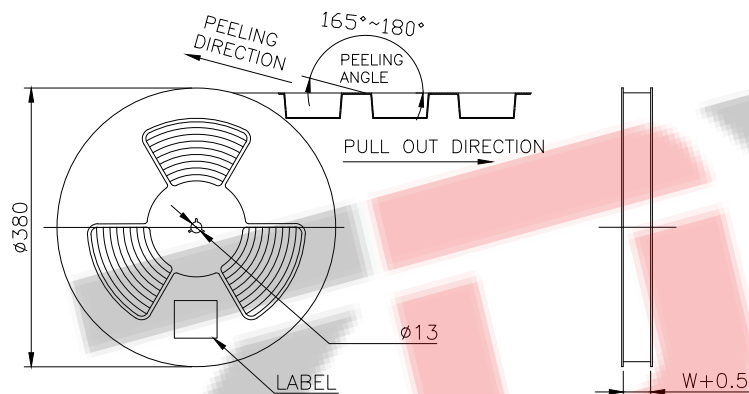
DETAIL X
SCALE 2:1

NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

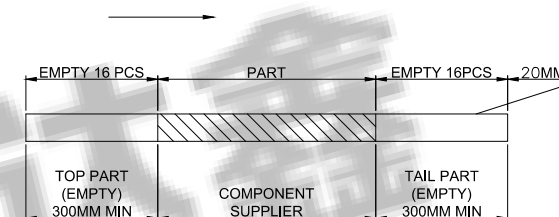

2. 上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT;
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION


深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE-C 24Pin板上DIP+SMT防水IPX8防水母座

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.:ZDX-CFMDS242CY17

TEL: 0755-29888153

WEB: <http://www.szzdjmj.com/>

SCALE:

1:1



SIZE:

A4

SHEET:

1/2

Location of label sticking (label at small positioning hole of the carrier tape side).
标签粘贴处（朝卷装包材的小定位孔一侧）

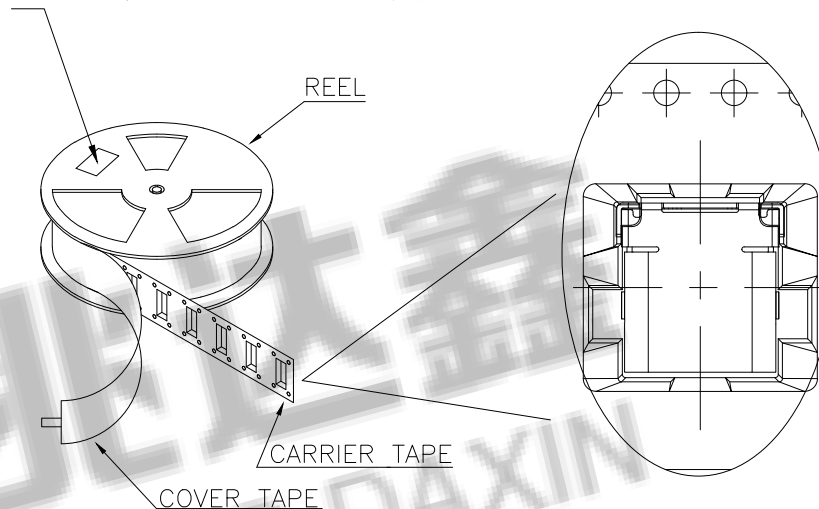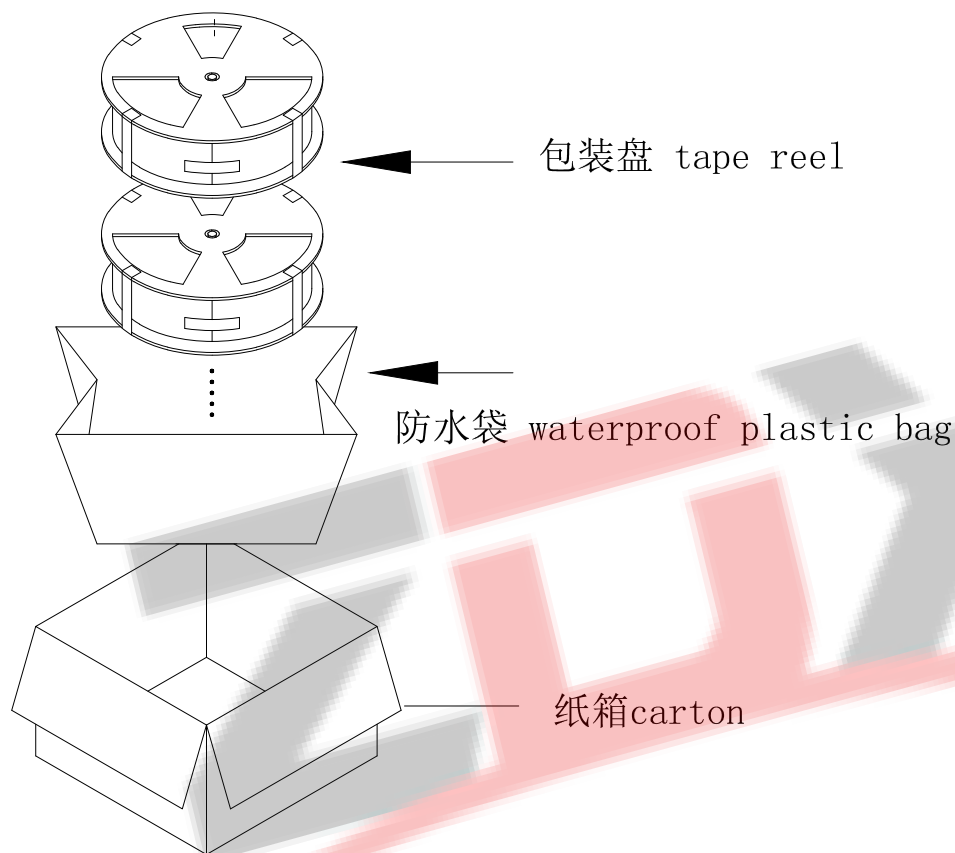

NOTE:

1. 每卷包装数量及每箱装箱数量如左下表格。
Packing q'ty of each reel & carton as below table shown.
2. 以上胶帶覆盖下包装帶经包装机自粘包装
Use cover tape to cover and hot melt machine to seal up.
3. 將装满产品的卷盘放入纸箱并以胶帶封口
Put reels in the carton and use adhesive tape to seal up.




深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

TYPE-C 24Pin板上DIP+SMT防水IPX8防水母座

工程图

THIRD ANGLE PROJECTION



UNIT:

mm

PART NO.:ZDX-CFMDS242CY17

TEL: 0755-29888153

WEB: <http://www.szzdjmj.com/>

SCALE:

1:1

SIZE:

A4

SHEET:

1/2

产品料号 (PRODUCT No.)	包装容量 (PACKING CAPACITY)			重量 WEIGHT (Kg)		
	PCS/REEL	REELS/CARTON	PCS/CARTON	N.W./PCS	N.W./BOX	G.W./BOX
	500	10	5000			