


RoHS Compliant

Halogen Free

customer drawing

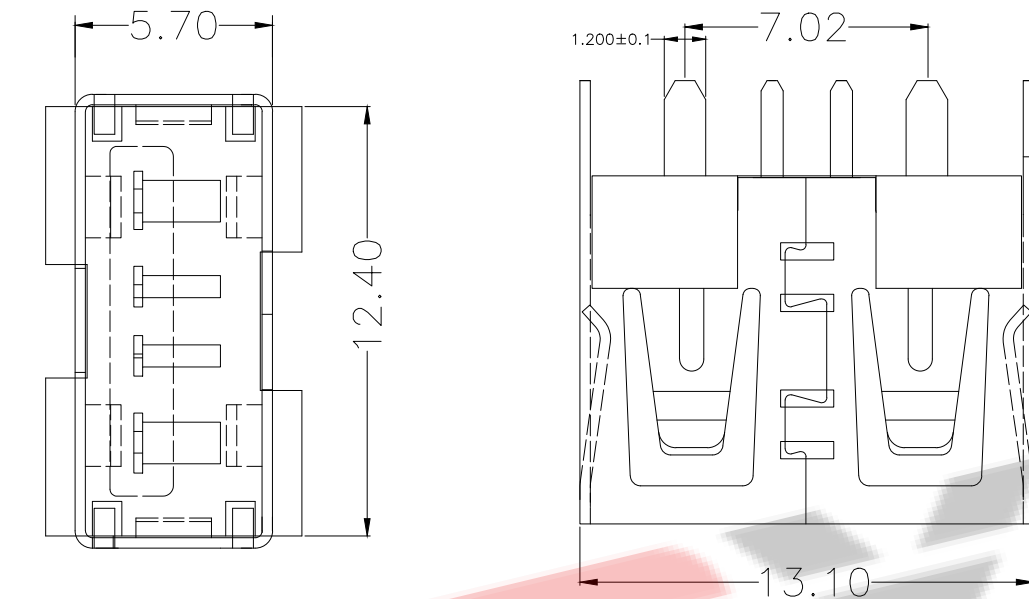

NOTE:

1. 材质
 - 1.1. 塑胶: PBT
 - 1.2. 端子: C2680R-H T=0.25±0.01
 - 1.3. 外壳: SPCC T=0.30±0.01
2. 机械性能:
 - 插拔力: 插入力 35N MAX , 拔出力 10N MIN
 - 机械寿命: 插拔1500次
3. 端子:
 - 打镍底50~80u", 焊脚镀锡80~120u", 接触区镀金1u"
4. 外壳: 镀镍

RECOMMENDED P.C.B LAYOUT



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

USB AF短体立插10.0 平口大电流


工程图

PART NO.:ZDX-AFLD041JF01

TEL:0755-29888153

WEB: <http://www.szzdjmkj.com/>

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/1