
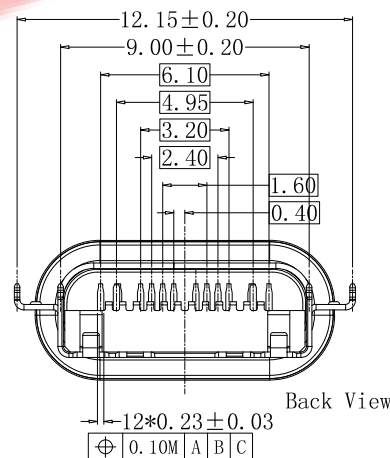
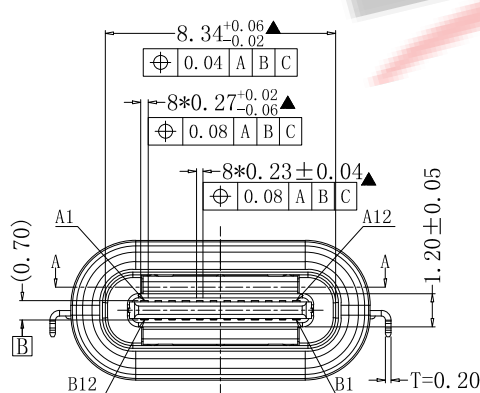
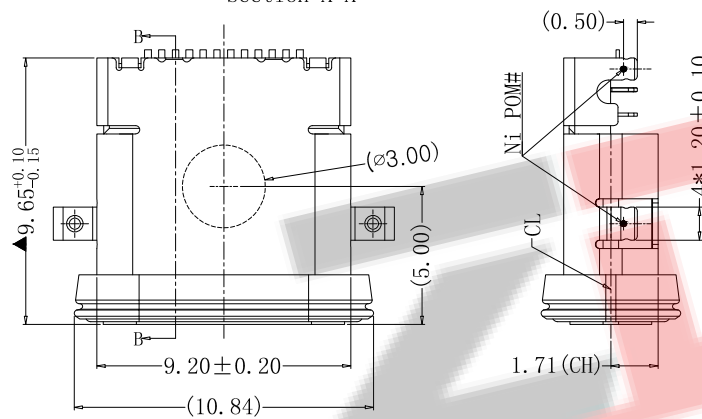


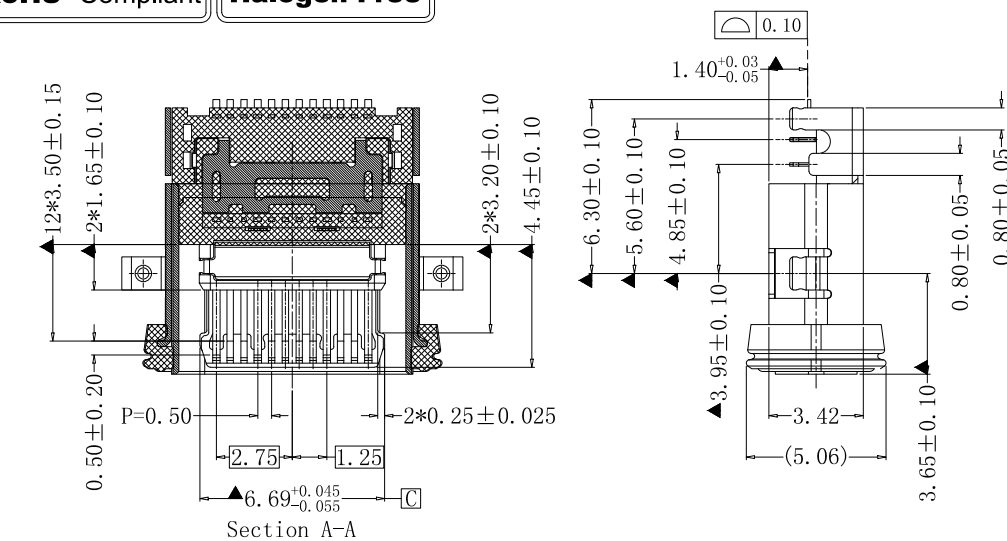


SPECIFICATION:

- Material & Finish: See the list;
- Mechanical:
 - Mating force: 5-20Nf;
 - Unmating force: Initial: 8-20Nf; Final: 6-20Nf;
 - Durability: 10000 Cycles;
- Electrical:
 - Current Rating:
VBus Pins: 5A, Vconn Pin: 1.25A, Other Pins: 0.25A;
 - Voltage Rating: 20V Max.;
 - Dielectric Withstanding voltage: 100Vac, 60S, 10mA;
 - Contact resistance: 40m Ohms Max.;
 - Insulation Resistance: 100M Ohms Min.;
- Environmental:
 - Operating temperature: -40° C ~ +85° C;
 - Salt Spray Test: 48H Min.;
 - Wetting Temperature: 265±5° C, 5±0.5s

PIN DEFINE TABLE			
PIN	SIGNAL	PIN	SIGNAL
A12	GND	B1	GND
A11	RX2+	B2	TX2+
A10	RX2-	B3	TX2-
A9	VBUS	B4	VBUS
A8	SBU1	B5	CC2
A7	D-	B6	
A6	D+	B7	
A5	CC1	B8	SBU2
A4	VBUS	B9	VBUS
A3	TX1-	B10	RX1-
A2	TX1+	B11	RX1+
A1	GND	B12	GND

NO.	PART NAME	Q'TY	MATERIAL	FINISH
5	Shell	1	SUS304-3/4H, T=0.20mm	50U"Ni Min.
4	GroundBar	1	SUS301-H, T=0.12mm	No Plating
3	Down Contact	8	C1814, T=0.12mm	Au15U"MIN/50U"Ni Min.
2	Top Contact	8	C1814, T=0.12mm	Au15U"MIN/50U"Ni Min.
1	Housing	1	PA 9T	UL 94 V-0

料号编码:

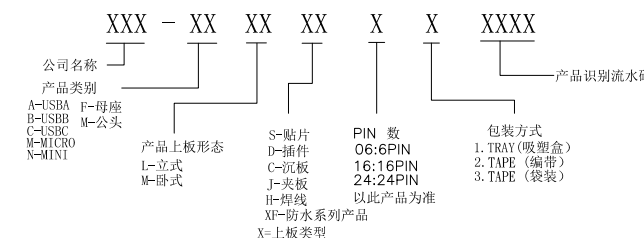

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd


TITLE:
Type-C 母座24Pin3M沉板L9.65
防水TH&SMT(加胶圈)-客户图
工程图

PART NO.: ZDX-CFMCF2420042

TEL: 0755-29888153

WEB: <http://www.szzdjmkj.com/>

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:


1:1

SIZE:



A4

SHEET:




1/3

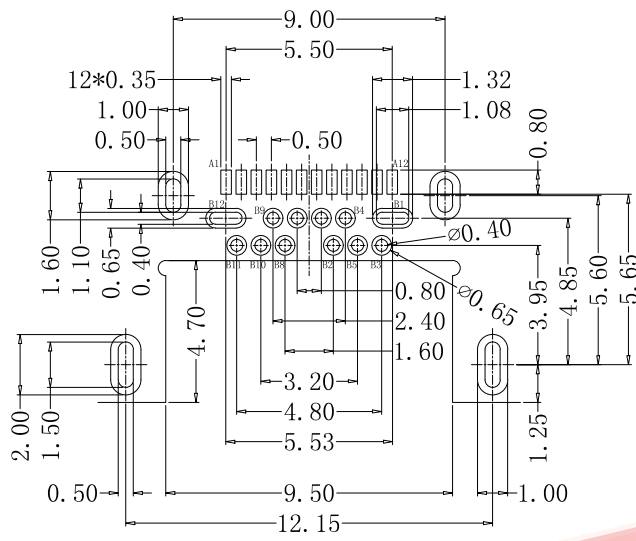

RECOMMENDED PCB LAYOUT, TOP VIEW
(THICKNESS=0.60MM; TOLERANCE: ±0.05)

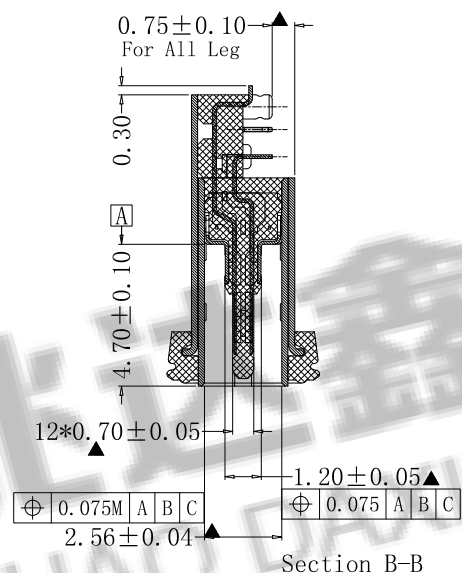
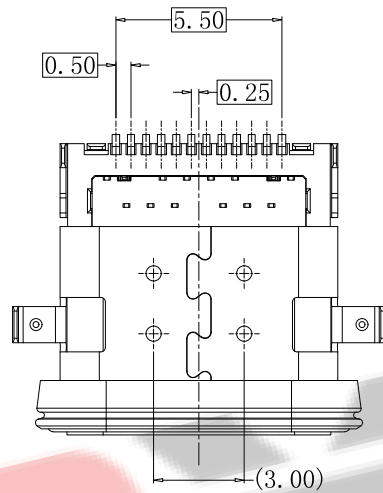


料号编码:

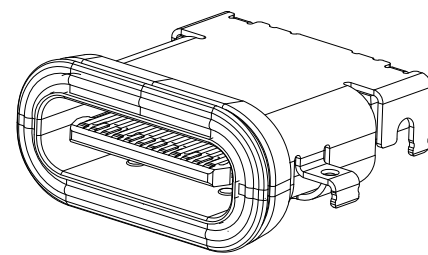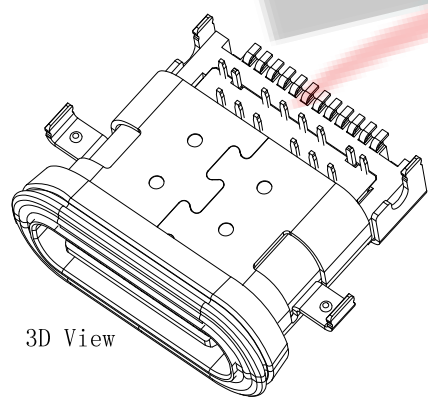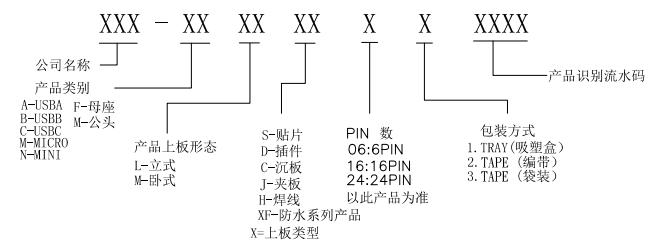

ZDX 深圳市兆达鑫科技有限公司
Shenzhen zhaodaxin Technology Co., Ltd

TITLE: Type-C 母座24Pin3M沉板L9.65 防水TH&SMT(加胶圈)-客户图 工程图		PART NO.:ZDX-CFMCF2420042		
		TEL:0755-29888153		
		WEB: http://www.szzdjmkj.com/		
THIRD ANGLE PROJECTION 	UNIT:	SCALE:	SIZE:	SHEET:
	mm	1:1	A4	2/3

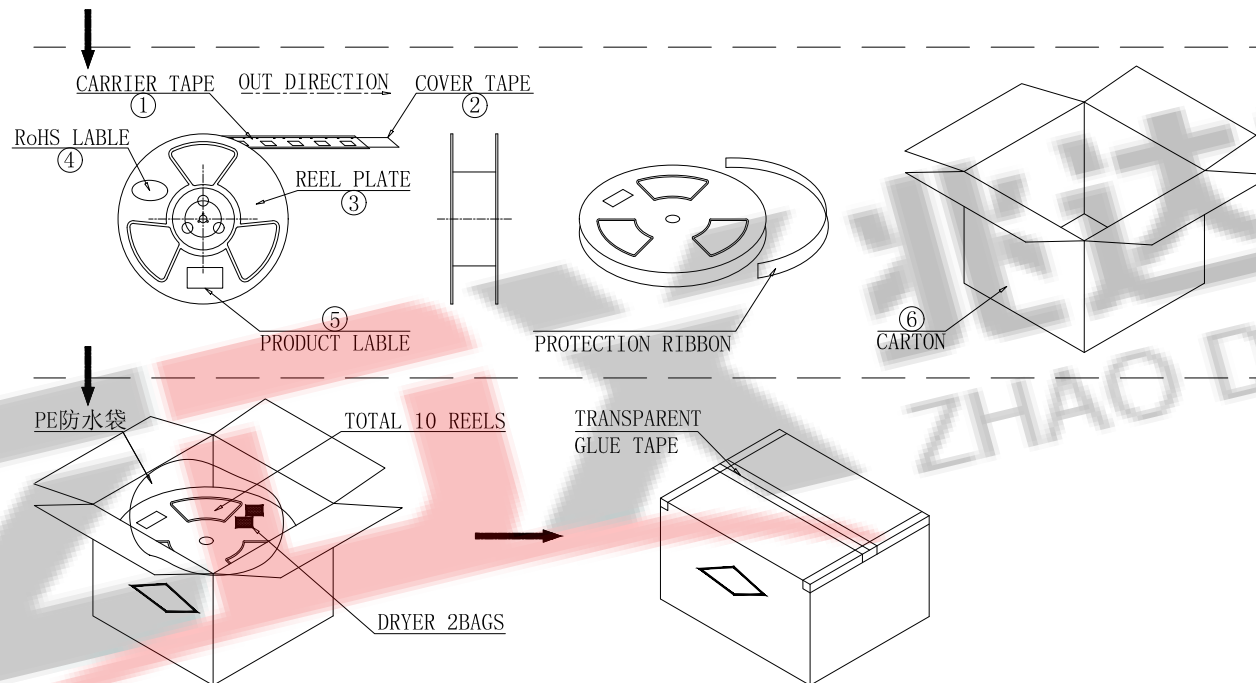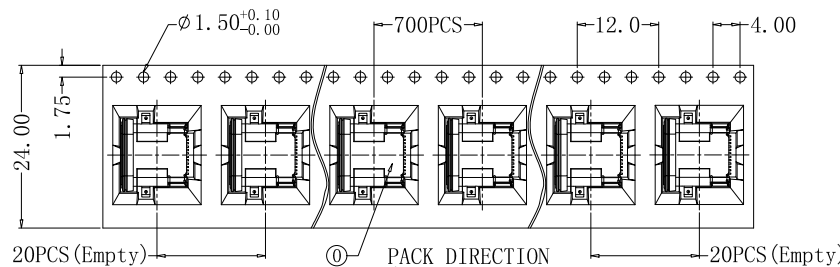

NO.	NAME	SPEC	Q' TY
①	TYPE C RECEPTACLE		7000PCS/CARTON
②	CARRIER TAPE	W=24mm, T=0.40mm	700PCS/PLATE
③	COVER TAPE	W=21.3mm	10PLATES/CARTON
④	REEL PLATE	φ330*100*24.4mm	10PCS/CARTON
⑤	RoHS LABEL		10PCS/CARTON
⑥	PRODUCT LABER		10PCS/CARTON
⑦	CARTON	350*340*310mm	1PCS/PACKAGE

说明:

- 每卷前后各空20PCS, 尾部用美纹胶纸封住;
- 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
- 每10卷盘一叠共7000Pcs并装入1个外箱内;
- 在搬运过程中要轻拿轻放;
- 在运输中不可堆放过多(1.8M最高), 不可重压;
- 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
 - 产品不可跑出下带凹槽;
 - 产品不可有摔伤, 变形;
 - 内包装材料不可严重破损.



深圳市兆达鑫科技有限公司

Shenzhen zhaodaxin Technology Co., Ltd

TITLE:

Type-C 母座24Pin3M沉板L9.65
防水TH&SMT(加胶圈)-包装图


工程图

PART NO.:ZDX-CFMSF2420042

TEL:0755-29888153

WEB: <http://www.szzdjmj.com/>

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

3/3